

## TOUCH II

7" touchscreen, user friendly and totally programmable.  
 Videos on display, ads, instructions.  
 37 Languages.  
 Free software for programming, telemetry, data analysis.  
 USB Connection

## OUTSTANDING FEATURES

Reversing drum action is standard.  
 Stainless steel drum is standard.  
 Frequency inverter is standard.

## EFFICIENCY

EFFICIENT DRY - Intelligent humidity control, with new drum inlet temperature control.  
 AIR RE-CYCLE - Efficient air recirculation system.  
 THERMAL INSULATION - Complete air-flow circuit and double door glass.  
 New optimized system of mixed airflow.

## VERSATILITY

Make to order - customization.  
 WET CLEANING configuration.

## CONNECTIVITY

Standard IoT Domus Connect.  
 Management for laundries: OPL and self-service.

## ERGONOMICS

Lint Filter Drawer, stainless steel mesh.  
 Large Loading doors.

## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
 Technical menu: statistics for technicians.

## OTHERS

Grey skin plate outer casing, stainless steel look.  
**NEW:** Geared motor drive on models UDTT-100 to UDTT-180  
 SFEX - Integrated Fire Extinguishing System.  
 SOFT DRY - new drum with stamped holes.  
 COOL DOWN - anti-wrinkle at the end of the cycle.  
 Heating options: natural gas or propane.  
 CE approved




## OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing Spraying
- Back panel with air filter UDTM-25 to UDTM-80
- Lint filter with grid 0,02 In (standard is 0,01 In)
- Lint filter with grid 0.04 In (standard is 0,01 In)
- Stainless steel front and side panels UDTT-30/35
- Front panel in stainless steel UDTT-25/30/35

CAPACITY & DRUM	UNIT.	UDTT-35 ECO-ENERGY
Capacity 1/18	Kg	18.3
	lb	40.4
Capacity 1/20	Kg	16.5
	lb	36.3
Ø Drum	mm	750
	inch	29.53
Drum length	mm	746
	inch	29.37
Drum volume	l	330
	cu ft	11.64
Ø Door hole	mm	574
	inch	22.60
Door center height	mm	976
	inch	38.43
Height from floor to bottom of door	mm	618
	inch	24.33
ELECTRIC HEATING		
Evaporation capacity	L/h	14.90
	US gallon/h	3.94
Hourly output	Kg/h	30
	lb/h	66.1
Installed heating power	kW	18
Installed electrical power	kW	18.97
Drum motor power	kW	0.37
GAS HEATING		
Evaporation capacity (gas model)	L/h	16.30
	US gallon/h	4.3
Hourly output (gas model)	Kg/h	33.60
	lb/h	74.1
Installed gas heating power	kcal/h	17638
	Btu/h	70000
Installed gas heating power	kW	20.51
Installed electrical power	kW	0.97
Instant propane gas consumption (G31)	Kg/h	1.76
	lb/h	3.88
Instant natural gas consumption (G20)	m <sup>3</sup> /h	2.17
	cfm	1.28
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	30
	Btu/h	102364
Installed electrical power	kW	0.97
Steam consumption (8 barG) - Standard	kg/h	53
Steam consumption (116 psiG)	lb/h	63.8
Steam pressure	barG	6 - 9
	psiG	87 - 130.5
Standard steam inlet - outlet	BSPT- ISO7.1	3/4"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure	kg/h	57
Steam consumption (72,5 psiG) - Low Pressure	lb/h	68.7
Steam pressure (low pressure)	barG	3 - 6
	psiG	43.5 - 87
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m <sup>3</sup> /h	-

Thermal oil connection	BSP	-	
<b>VENTILATION</b>			
Fan motor power	kW	0.55	
	m <sup>3</sup> /h	1200	
Nominal air flow rate	cfm	706.3	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7.87	
<b>HEAT EMISSION</b>			
Maximum total heat emission	kW	1.44	
	Btu/h	4916.4	
Max. front heat emission	kW	0.9	
	Btu/h	3072.7	
<b>CONNECTIONS</b>			
Voltage 120/60/1~ + G	Nº x AWG / A	E	S
Voltage 230/3~ + G	-	-	-
Voltage 480/3~ + G	-	-	-
<b>NET DIMENSIONS / D. WITH PACKING</b>			
Net / gross width	mm	785 / 865	
	inch	30,91 / 34,06	
Net / gross depth	mm	1.125 / 1.210	
	inch	44,29 / 47,64	
Net height / gross height without heating	mm	1.694 / 1.840	
	inch	66,69 / 72,44	
Net / gross weight	Kg	187 / 200	
	lb.	412,26 / 440,92	
<b>OTHERS</b>			
Sound level	dB	64	

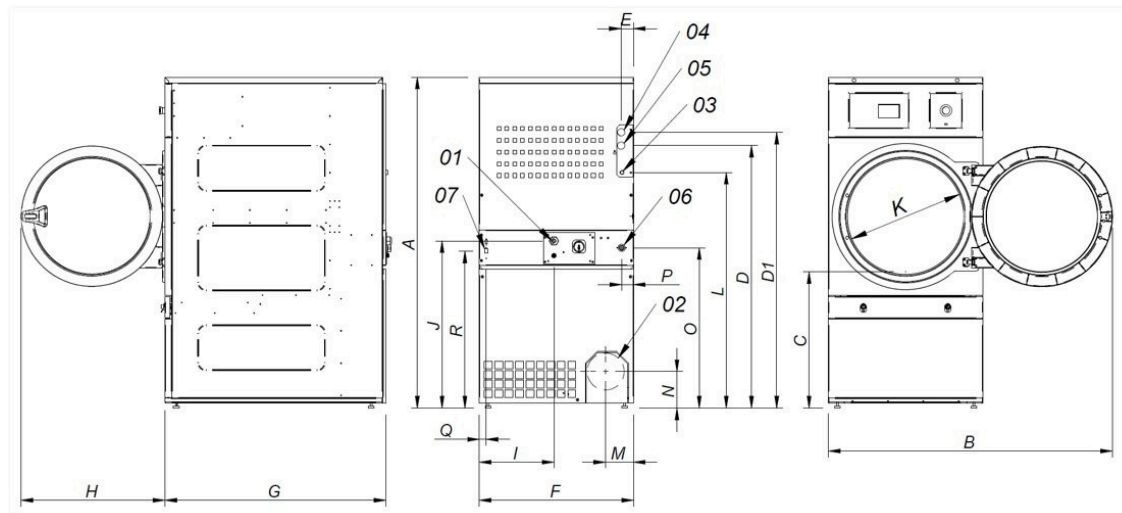

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (UDTT-25-30-35)
- 04 Steam inlet 1" (UDTT-50)
- 05 Condensate outlet 3/4" (UDTT-25-30-35)
- 05 Condensate 1" (UDTT-50)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

UDTT-35	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
ECO-ENERGY	66.69	56.96	27.12	53.30	55.98	2.67	2.67	30.9	44.29	28.93	14.96	34.25	22.63	48.26	5.23	7.08	32.67	2.55	1.37	31.69