

TOUCH II

7" touchscreen, user friendly and totally programmable.
 Videos on display, ads, instructions.
 37 Languages.
 Free software for programming, telemetry, data analysis.
 USB Connection

OUTSTANDING FEATURES

Reversing drum action is standard.
 Stainless steel drum (**optional**).
 Frequency inverter is standard.

EFFICIENCY

Double Flow: mixed axial-radial airflow, Optional.
 Large Lint filter.

VERSATILITY

Make to order - customization.
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses WET CLEANING configuration.

CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
 Management of laundries: OPL and self-service.

ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
 Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.
 Easy access to parts for reparability.

OTHERS

Grey skin plate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
 SOFT DRY - new drum with stamped holes.
 COOL DOWN - anti-wrinkle at the end of the cycle.
 Heating options: natural gas and propane.
 CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double door glass UDTT-65 to UDTT-180
- Fire extinguisher SFEX UDTT-50/65
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing-spraying
- Back panel with air filter UDTT-25 to UDTT-80
- Lint filter with grid 0.02 In (standard is 0.01 In)
- Lint filter with grid 0.04 In (standard is 0.01 In)
- Stainless steel front and side panels UDTT-65
- Front panel in stainless steel UDTT-65/80

| CAPACITY & DRUM | | UNIT. | UDTT-65 |
|--|--|--------------------------|------------|
| Capacity 1/18 | | Kg | 28 |
| | | lb | 67.3 |
| Capacity 1/20 | | Kg | 27.5 |
| | | lb | 60.6 |
| Ø Drum | | mm | 947 |
| | | inch | 37.28 |
| Drum length | | mm | 780 |
| | | inch | 30.71 |
| Drum volume | | l | 550 |
| | | cu ft | 19.42 |
| Ø Door hole | | mm | 802 |
| | | inch | 31.54 |
| Door center height | | mm | 1040 |
| | | inch | 40.94 |
| Height from floor to bottom of door | | mm | 578 |
| | | inch | 22.74 |
| ELECTRIC HEATING | | | |
| Evaporation capacity | | L/h | 26.1 |
| | | US gallon/h | 6.9 |
| Hourly output | | Kg/h | 48.4 |
| | | lb/h | 106.7 |
| Installed heating power | | kW | 30 |
| Installed electrical power | | kW | 21.15 |
| Drum motor power | | kW | 0.55 |
| GAS HEATING | | | |
| Evaporation capacity (gas model) | | L/h | 30.9 |
| | | US gallon/h | 8163 |
| Hourly output (gas model) | | Kg/h | 59.3 |
| | | lb/h | 130.7 |
| Installed gas heating power | | kcal/h | 35276 |
| | | Btu/h | 139986.5 |
| Installed gas heating power | | kW | 41 |
| Installed electrical power | | kW | 1.15 |
| Instant propane gas consumption (G31) | | Kg/h | 3.51 |
| | | lb/h | 7.74 |
| Instant natural gas consumption (G20) | | m ³ /h | 4.34 |
| | | cfm | 2.55 |
| Ø Gas inlet | | BSPP ISO 228-1 | 1/2" |
| STEAM HEATING | | | |
| Installed steam heating power | | kW | 50.10 |
| | | Btu/h | 170948 |
| Installed electrical power | | kW | 1.15 |
| Steam consumption (8 barG) - Standard | | kg/h | 89 |
| Steam consumption (116 psiG) | | lb/h | 107.2 |
| Steam pressure | | barG | 6 - 9 |
| | | psiG | 87 - 130.5 |
| Standard steam inlet - outlet | | BSPT- ISO7.1 | 1" |
| Standard steam inlet - outlet | | NPT ANSI B1.20.1 Tapered | 1" |
| Steam consumption (5 barG) - Low Pressure | | kg/h | 93 |
| Steam consumption (72,5 psiG) - Low Pressure | | lb/h | 112 |
| Steam pressure (low pressure) | | barG | 3 - 6 |
| | | psiG | 43.5 - 89 |
| Low pressure steam inlet - outlet | | BSPT- ISO7.1 | 1" 1/2 |
| THERMAL OIL HEATING | | | |
| Installed heating power | | kW | - |
| Installed electrical power | | kW | - |
| Fluid consumption (T max 175°C) | | m ³ /h | - |

| | | | |
|---|-------------------|-----------------|--------------|
| Thermal oil connection | BSP | - | |
| VENTILATION | | | |
| Fan motor power | kW | 0.55 | |
| | m ³ /h | 1200 | |
| Nominal air flow rate | cfm | 706.29 | |
| Ø Fume exhaust | mm | 200 | |
| Ø Fume exhaust | inch | 7.87 | |
| HEAT EMISSION | | | |
| Maximum total heat emission | kW | 3 | |
| | Btu/h | 10242.4 | |
| Max. front heat emission | kW | 2.1 | |
| | Btu/h | 7169.7 | |
| CONNECTIONS | | | |
| Voltage 120/60/1~ + G | Nº x AWG / A | E | S |
| Voltage 230 - 3~ + G | - | - | 3 X 12 /20 A |
| Voltage 480 - 3~ + G | - | - | - |
| NET DIMENSIONS / D. WITH PACKING | | | |
| Net / gross width | mm | 985 / 1065 | |
| | inch | 38.78 / 41.93 | |
| Net / gross depth | mm | 1054 / 1154 | |
| | inch | 41.50 / 45.43 | |
| Net height / gross height without heating | mm | 1975 / 2080 | |
| | inch | 77.76 / 81.89 | |
| Net / gross weight | Kg | 230 / 260 | |
| | lb | 507.06 / 573.20 | |
| OTHERS | | | |
| Sound level | dB | 65 | |

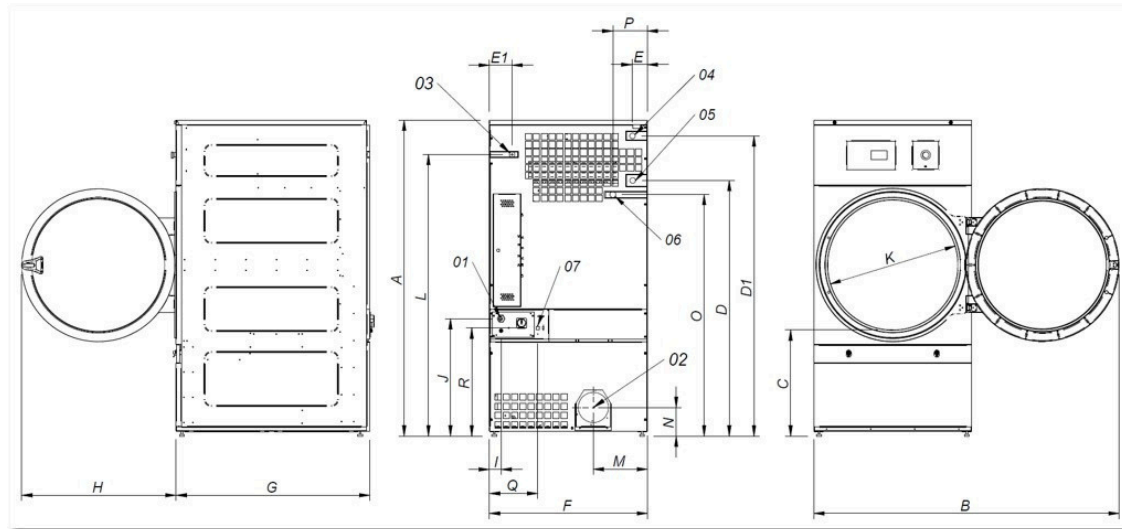

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 1"
- 05 Condensate 1"
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

| | A | B | C | D | D1 | E | E1 | F | G | H | I | J | K | L | M | N | O | P | Q | R |
|---------|-------|-------|-------|-------|-------|------|------|-------|-------|-------|------|-------|-------|-------|------|------|-------|------|------|-------|
| UDTT-65 | 71.75 | 75.19 | 25.98 | 62.59 | 73.81 | 4.01 | 5.11 | 38.77 | 41.49 | 38.18 | 2.75 | 28.74 | 31.57 | 69.29 | 13.2 | 7.00 | 59.44 | 8.46 | 11.8 | 26.61 |