

ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action is standard.

Galvanized drum is standard.

Frequency inverter is standard.

VERSATILITY

Make to order - customization.

OPL > Self-service - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

Lint filter, stainless steel mesh.

Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.

Technical menu: statistics for technicians and

maintenance with external console (with console option).


OTHERS

White panels.

COOL DOWN - anti-wrinkle at the end of the cycle.

Heating options: natural gas and propane.

CE approved

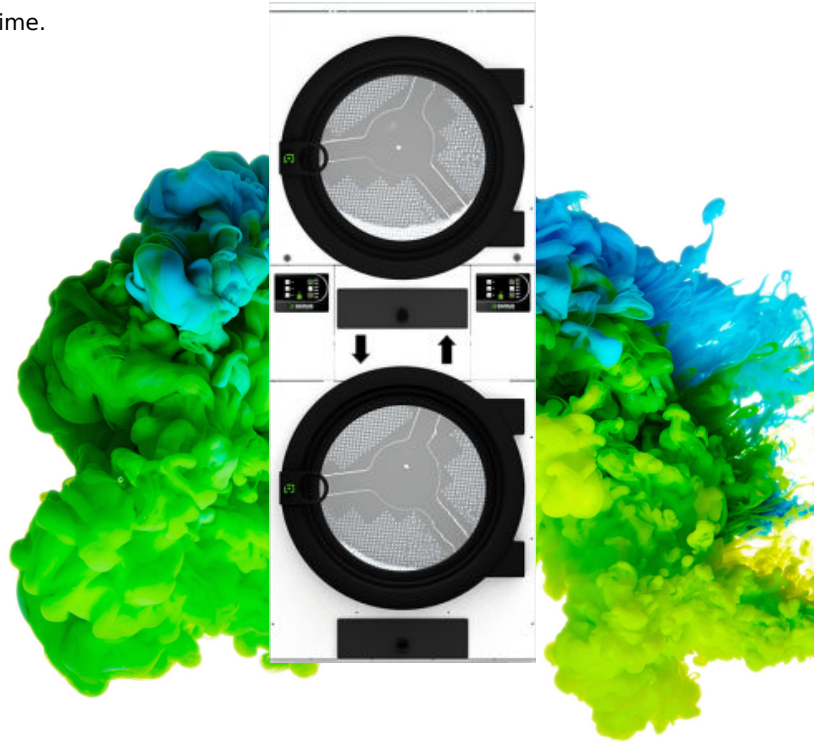


OPTIONS

- Natural gas heated tumble dryer
- Screen in M programmer (2 units)
- Lint filter with grid 0,01 In (standard in STACK is 0,02 In)

CAPACITY & DRUM	UNIT.	UDLM2-50	
Capacity 1/18	Kg	24.3	
	lb.	53.6	
Capacity 1/20	Kg	21.9	
	lb.	48.3	
Ø Drum	mm	835	
	inch	32.87	
Drum length	mm	800	
	inch	31.50	
Drum volume	l	440	
	cu ft.	15.54	
Ø Door hole	mm	575	
	inch	22.64	
Door center height	mm	547 / 1618	
	inch	22.60 / 63.70	
Height from floor to bottom of door	mm	286 / 1330	
	inch	11.26 / 52.36	
ELECTRIC HEATING			
Evaporation capacity	L/h	-	
	US gallon/h	-	
Hourly output	Kg/h	-	
	lb/h	-	
Installed heating power	kW	-	
Installed electrical power	kW	-	
Drum motor power	kW	0.37 x2	
GAS HEATING			
Evaporation capacity (gas model)	L/h	44	
	US gallon/h	11.624	
Hourly output (gas model)	Kg/h	88	
	lb./h	194	
Installed gas heating power	kcal/h	26139 x2	
	Btu/h	103658.5 x2	
Installed gas heating power	kW	30.4 x2	
Installed electrical power	kW	1.94	
Instant propane gas consumption (G31)	Kg/h	2.61 x2	
	lb./h	5.75 x2	
Instant natural gas consumption (G20)	m ³ /h	3.22 x2	
	cfm	1.89 x2	
Ø Gas inlet	BSPP ISO 228-1	3/4"	
VENTILATION			
Fan motor power	kW	0.55 x2	
Nominal air flow rate	m ³ /h	900 x2	
	cfm	529.72 x2	
Ø Fume exhaust	mm	250 x2	
Ø Fume exhaust	inch	10 x2	
HEAT EMISSION			
Maximum total heat emission Max.	kW	2.6	
	Btu/h	8876.8	
front heat emission	kW	1.9	
	Btu/h	6486.9	
CONNECTIONS			
Voltage 120/60/1~ + G	Nº x AWG / A	E	G
Voltage 230 - 3~ + G	-	-	-
Voltage 480 - 3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	870 / 950	
	inch	34.25 / 37.40	

Net / gross depth	mm	1312 / 1395
	inch	51.65 / 54.92
Net height / gross height without heating	mm	2118 / 2250
	inch	83.39 / 88.58
Net / gross weight	Kg	373.5 / 388.5
	lb	823.43 / 856.50
OTHERS		
Sound level	dB	69

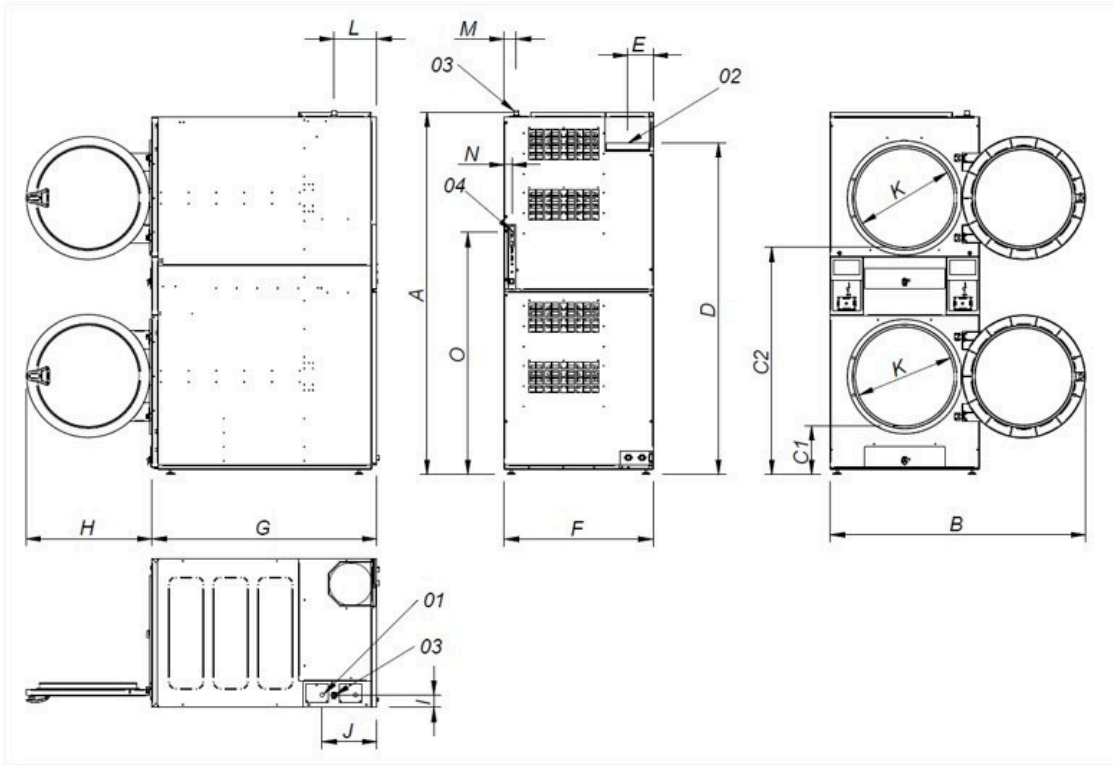

- 01 Power supply
- 02 Fumes output 10"
- 03 Gas inlet 3/4"
- 04 Ethernet connection (only TOUCH control)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
UDLM2- 50	83.38	58.66	11.2	52.36	76.37	5.86	34.2	51.65	28.9	2.8	12.5	22.6	9.84	2.7	1.7	55.74