



ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.



OUTSTANDING FEATURES

Reversing drum action is standard.

Galvanized drum is standard.

Frequency inverter is standard.



VERSATILITY

Make to order - customization.

OPL > Self-service - Standard OPL model easily transformable to coin laundry uses.



ERGONOMICS

Lint filter, stainless steel mesh.

Large Loading doors.



MAINTENANCE

Hinged control panel: easy and ergonomic access.

Technical menu: statistics for technicians and

maintenance with external console (with console option).



OTHERS

White panels.

COOL DOWN - anti-wrinkle at the end of the cycle.

Heating options: natural gas and propane.

CE approved




OPTIONS

- Natural gas heated tumble dryer
- Screen in M programmer (2 units)
- Lint filter with grid 0,01 In (standard in STACK is 0,02 In)

CAPACITY & DRUM		UNIT.	UDLM2-35	
Capacity 1/18		Kg	18.3	
		lb.	40.4	
Capacity 1/20		Kg	16.5	
		lb.	36.3	
Ø Drum		mm	750	
		inch	29.53	
Drum length		mm	746	
		inch	29.37	
Drum volume		l	330	
		cu ft.	11.64	
Ø Door hole		mm	574	
		inch	22.60	
Door center height		mm	547 / 1522	
		inch	21.54 / 59.92	
Height from floor to bottom of door		mm	260 / 1235	
		inch	10.24 / 48.62	
ELECTRIC HEATING				
Evaporation capacity		L/h	18.1	
		US gallon/h	4.78	
Hourly output		Kg/h	36.2	
		lb/h	79.8	
Installed heating power		kW	12 x2	
Installed electrical power		kW	25.34	
Drum motor power		kW	0.37 x2	
GAS HEATING				
Evaporation capacity (gas model)		L/h	18	
		US gallon/h	4.755	
Hourly output (gas model)		Kg/h	36	
		lb./h	79.4	
Installed gas heating power		kcal/h	10327 x2	
		Btu/h	40945.7 x2	
Installed gas heating power		kW	12 x2	
Installed electrical power		kW	1.34	
Instant propane gas consumption (G31)		Kg/h	1.03 x2	
		lb./h	2.27 x2	
Instant natural gas consumption (G20)		m³/h	1.27 x2	
		cfm	0.75 x2	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0.25 x2	
Nominal air flow rate		m³/h	500 x2	
		cfm	294.28 x2	
Ø Fume exhaust		mm	200 x2	
Ø Fume exhaust		inch	8 x2	
HEAT EMISSION				
Maximum total heat emission Max.		kW	2.4	
		Btu/h	8193.9	
front heat emission		kW	1.68	
		Btu/h	5735.8	
CONNECTIONS			E	G
Voltage 120/60/1~ + G		Nº x AWG / A	-	3 X 14 /15 A
Voltage 230 - 3~ + G		-	-	-
Voltage 480 - 3~ + G		-	-	-
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30.91 / 34.06	

Net / gross depth	mm	1242 / 1325
	inch	48.90 / 52.17
Net height / gross height without heating	mm	1980 / 2126
	inch	77.95 / 83.70
Net / gross weight	Kg	290 / 317
	lb	639.34 / 698.87
OTHERS		
Sound level	dB	64

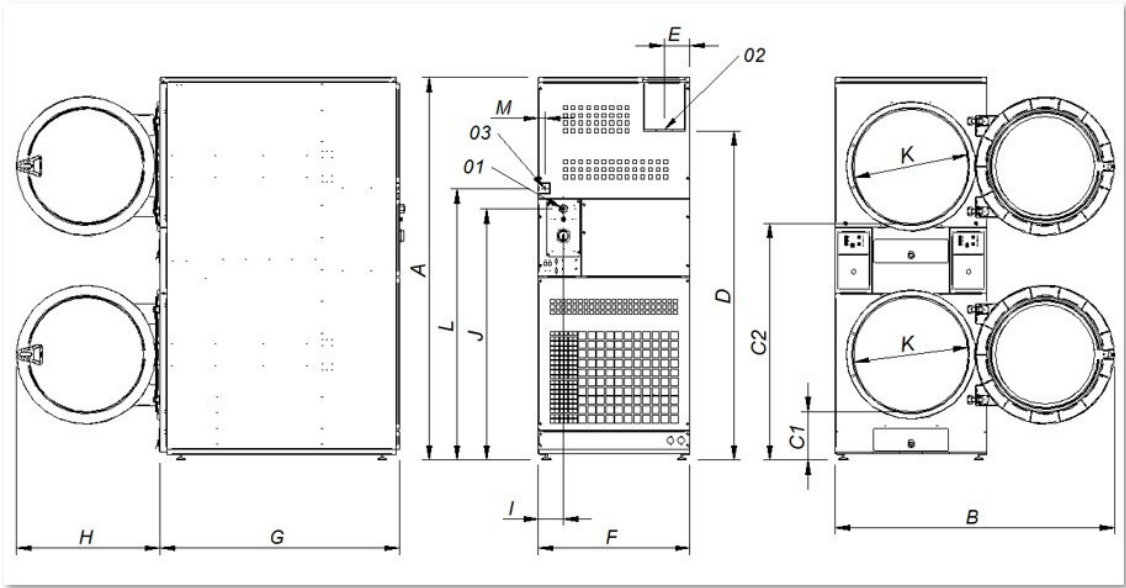

01 Power supply
02 Fumes output 8"
03 Gas inlet 1/2"

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
UDLM2- 35	77.95	56.96	10.07	48.58	66.14	5.31	30.90	43.54	28.93	5.11	50.19	22.63	55.35	1.37