

TOUCH II

7" touchscreen, user friendly and totally programmable.
 Videos on display, ads, instructions.
 37 Languages.
 Free software for programming, telemetry, data analysis.
 USB Connection

OUTSTANDING FEATURES

Reversing drum action is standard.
 Stainless steel drum (**optional**).
 Frequency inverter is standard.

EFFICIENCY

Double Flow: mixed axial-radial airflow.

VERSATILITY

Make to order - customization.
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses
 Wet Cleaning phases customizes parameters

CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
 Management of laundries: OPL and self-service.

ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
 Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.

OTHERS

Grey skin plate outer casing, stainless steel look.
 SOFT DRY - new drum with stamped holes.
 COOL DOWN - anti-wrinkle at the end of the cycle.
 Heating options: natural gas and propane.
 CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY for STACK (order 1 unit per column)
- Double door glass (order 1 unit per column)
- Fire extinguisher SFEX STACK (order 1 unit per column)
- Tropicalized model (order 1 unit per column)
- Opposite door opening (order 1 unit per column)
- Back panel with air filter (STACK)
- Lint filter with grid 0.01 In (standard in STACK is 0.02 In)
- Stainless steel front and side panels UDTT2-50
- Front panel in stainless steel UDTT2-50

CAPACITY & DRUM		UNIT.		UDTT2-50	
Capacity 1/18		Kg		24.3	
		lb		53.6	
Capacity 1/20		Kg		21.9	
		lb		48.3	
Ø Drum		mm		8.35	
		inch		32.87	
Drum length		mm		800	
		inch		31.50	
Drum volume		l		440	
		cu ft		15.54	
Ø Door hole		mm		575	
		inch		22.64	
Door center height		mm		547 / 1618	
		inch		22.60 / 63.70	
Height from floor to bottom of door		mm		286 / 1330	
		inch		11.26 / 52.36	
ELECTRIC HEATING					
Evaporation capacity		L/h		-	
		US gallon/h		-	
Hourly output		Kg/h		-	
		lb/h		-	
Installed heating power		kW		-	
Installed electrical power		kW		-	
Drum motor power		kW		0.37 x2	
GAS HEATING					
Evaporation capacity (gas model)		L/h		44	
		US gallon/h		11.624	
Hourly output (gas model)		Kg/h		88	
		lb/h		194	
Installed gas heating power		kcal/h		26139 x2	
		Btu/h		103658.5 x2	
Installed gas heating power		kW		30.4 x2	
Installed electrical power		kW		1.94	
Instant propane gas consumption (G31)		Kg/h		2.61 x2	
		lb/h		5.75 x2	
Instant natural gas consumption (G20)		m³/h		3.22 x2	
		cfm		1.89 x2	
Ø Gas inlet		BSPP ISO 228-1		3/4"	
VENTILATION					
Fan motor power		kW		0.55 x2	
Nominal air flow rate		m³/h		900 x2	
		cfm		529.72 x2	
Ø Fume exhaust		mm		250 x2	
Ø Fume exhaust		inch		9.84 x2	
HEAT EMISSION					
Maximum total heat emission Max.		kW		2.6	
		Btu/h		8876.8	
front heat emission		kW		1.9	
		Btu/h		6486.9	
CONNECTIONS				E	G
Voltage 120/60/1~ + G		Nº x AWG / A		-	3 X 10 /30 A
Voltage 230 - 3~ + G		-		-	-
Voltage 480 - 3~ + G		-		-	-
NET DIMENSIONS / D. WITH PACKING					
Net / gross width		mm			
		inch			

	mm	1312 / 1395
Net / gross depth	inch	51.65 / 54.92
	mm	2118 / 2250
Net height / gross height without heating	inch	83.39 / 88.58
	Kg	373.5 / 388.5
Net / gross weight	lb.	823.43 / 856.50
OTHERS		
Sound level	dB	69

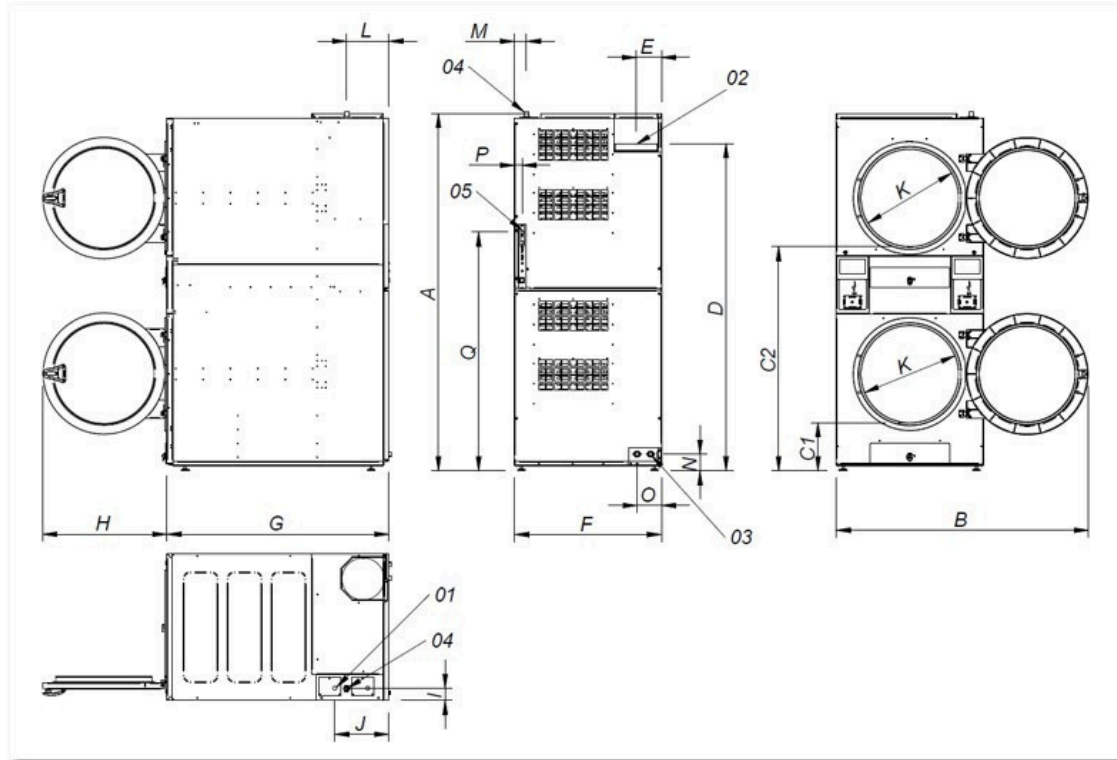

- 01 Power supply
- 02 Fumes output Ø 250
- 03 2 sprinkler valves 3/4"
- 04 Gas inlet 3/4"
- 05 Ethernet connection (only TOUCH control)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
UDTT2-50	83.3	58.66	11.25	52.36	76.37	5.86	34.25	51.65	28.93	2.87	12.59	22.63	9.84	2.75	3.93	5.70	1.77	55.74