

## TOUCH II

7" touchscreen, user friendly and totally programmable.  
 Videos on display, ads, instructions.  
 37 Languages.  
 Free software for programming, telemetry, data analysis.  
 USB Connection

## OUTSTANDING FEATURES

Reversing drum action is standard.  
 Stainless steel drum **(optional)**.  
 Frequency inverter is standard.

## EFFICIENCY

**Double Flow:** mixed axial-radial airflow.

## VERSATILITY

Make to order - customization.  
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses  
 Wet Cleaning phases customizes parameters

## CONNECTIVITY

IoT- **DOMUSCONNECT** standard.  
 Management of laundries: OPL and COIN.

## ERGONOMICS

Lint Filter Drawer, stainless steel mesh.  
 Large Loading doors.

## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
 Technical menu: statistics for technicians.

## OTHERS

Grey skin plate outer casing, stainless steel look.  
 SOFT DRY - new drum with stamped holes.  
 COOL DOWN - anti-wrinkle at the end of the cycle.  
 Heating options: electric, gas.  
 CE approved




## OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY for STACK (order 1 unit per column)
- Double door glass (order 1 unit per column)
- Fire extinguisher SFEX STACK (order 1 unit per column)
- Tropicalized model (order 1 unit per column)
- Opposite door opening (order 1 unit per column)
- Dosing-spraying (1 unit x column)
- Back panel with air filter (STACK)
- Lint filter with grid 0.01 In (standard in STACK is 0.02In)
- Front panel in stainless steel UDTT2-25/30/35

CAPACITY & DRUM	UNIT.	UDTT2-35	
Capacity 1/18	Kg	18.3	
	lb	40.4	
Capacity 1/20	Kg	16.5	
	lb	36.3	
Ø Drum	mm	750	
	inch	29.53	
Drum length	mm	746	
	inch	29.37	
Drum volume	l	330	
	cu ft	11.64	
Ø Door hole	mm	574	
	inch	22.60	
Door center height	mm	547 / 1522	
	inch	21.54 / 59.92	
Height from floor to bottom of door	mm	260 / 1235	
	inch	10.24 / 48.62	
ELECTRIC HEATING			
Evaporation capacity	L/h	18.1	
	US gallon/h	4.78	
Hourly output	Kg/h	36.2	
	lb/h	79.8	
Installed heating power	kW	12 x2	
Installed electrical power	kW	25.34	
Drum motor power	kW	0.37 x2	
GAS HEATING			
Evaporation capacity (gas model)	L/h	18	
	US gallon/h	4755	
Hourly output (gas model)	Kg/h	36	
	lb/h	79.4	
Installed gas heating power	kcal/h	10327 x2	
	Btu/h	409457 x2	
Installed gas heating power	kW	12 x2	
Installed electrical power	kW	1.34	
Instant propane gas consumption (G31)	Kg/h	1.03 x2	
	lb/h	2.27 x2	
Instant natural gas consumption (G20)	m <sup>3</sup> /h	1.27 x2	
	cfm	0.75 x2	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
VENTILATION			
Fan motor power	kW	0.25 x2	
Nominal air flow rate	m <sup>3</sup> /h	500 x2	
	cfm	294.28 x2	
Ø Fume exhaust	mm	200 x2	
Ø Fume exhaust	inch	7.78 x2	
HEAT EMISSION			
Maximum total heat emission Max.	kW	2.4	
	Btu/h	8193.9	
front heat emission	kW	1.68	
	Btu/h	5735.8	
CONNECTIONS		E	G
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 14 /15 A
Voltage 230 - 3~ + G	-	-	-
Voltage 480 - 3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	785 / 865	
	inch	30.91 / 34.06	

Net / gross depth	mm	1242 / 1325
	inch	48.90 / 52.17
Net height / gross height without heating	mm	1980 / 2126
	inch	77.95 / 83.70
Net / gross weight	Kg	290 / 317
	lb	639.34 / 698.87
<b>OTHERS</b>		
Sound level	dB	64

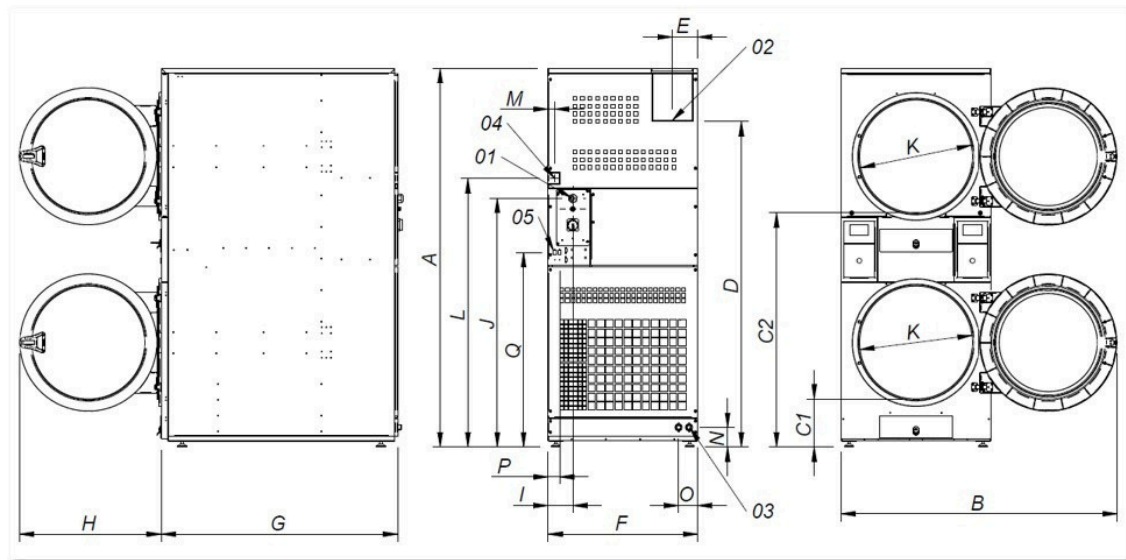

- 01 Power supply
- 02 Fumes output Ø 200
- 03 2 sprinkler valves 3/4"
- 04 Gas inlet 1/2"
- 05 Ethernet connection (only TOUCH control)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
UDTT2-35	77.95	56.96	10.19	48.58	66.14	5.31	30.90	48.89	28.93	5.11	50.19	22.63	5.35	1.3	4.05	3.93	2.36	40.07