

TOUCH II

7" touchscreen, user friendly and totally programmable.
 Videos on display, ads, instructions.
 37 Languages.
 Free software for programming, telemetry, data analysis.
 USB Connection

OUTSTANDING FEATURES

Reversing drum action is standard.
 Stainless steel drum (**optional**).
 Frequency inverter is standard.

EFFICIENCY

Double Flow: mixed axial-radial airflow, Optional.
 Large Lint filter.

VERSATILITY

Make to order - customization.
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses
 WET CLEANING configuration.

CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
 Management of laundries: OPL and self-service.

ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
 Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.
 Easy access to parts for reparability.

OTHERS

Grey skin plate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
 SOFT DRY - new drum with stamped holes.
 COOL DOWN - anti-wrinkle at the end of the cycle.
 Heating options: natural gas and propane.
 CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double door glass UDTT-25/30/35/50
- Fire extinguisher SFEX UDTT-25/30/35
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing-spraying
- Back panel with air filter UDTT-25 to UDTT-80
- Lint filter with grid 0.02 In (standard is 0.01 In)
- Lint filter with grid 0.04 In (standard is 0.01 In)
- Stainless steel front and side panels UDTT- 30/35
- Front panel in stainless steel UDTT-30/30/35

CAPACITY & DRUM		UNIT.	UDTT-30
Capacity 1/18		Kg	15
		lb	33.1
Capacity 1/20		Kg	13.5
		lb	29.8
Ø Drum		mm	750
		inch	29.53
Drum length		mm	610
		inch	24.02
Drum volume		l	270
		cu ft	9.53
Ø Door hole		mm	574
		inch	22.60
Door center height		mm	976
		inch	38.43
Height from floor to bottom of door		mm	618
		inch	24.33
ELECTRIC HEATING			
Evaporation capacity		L/h	13.5
		US gallon/h	3.6
Hourly output		Kg/h	26.9
		lb/h	59.3
Installed heating power		kW	18
Installed electrical power		kW	18.67
Drum motor power		kW	0.37
GAS HEATING			
Evaporation capacity (gas model)		L/h	15.4
		US gallon/h	4068
Hourly output (gas model)		Kg/h	30.3
		lb/h	66.7
Installed gas heating power		kcal/h	17638
		Btu/h	70000
Installed gas heating power		kW	20.51
Installed electrical power		kW	0.67
Instant propane gas consumption (G31)		Kg/h	1.76
		lb/h	3.88
Instant natural gas consumption (G20)		m ³ /h	2.17
		cfm	1.28
Ø Gas inlet		BSPP ISO 228-1	1/2"
STEAM HEATING			
Installed steam heating power		kW	30
		Btu/h	102364
Installed electrical power		kW	0.67
Steam consumption (8 barG) - Standard		kg/h	53
Steam consumption (116 psiG)		lb/h	63.8
Steam pressure		barG	6 - 9
		psiG	87 - 130.5
Standard steam inlet - outlet		BSPT- ISO7.1	3/4"
Standard steam inlet - outlet		NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure		kg/h	57
Steam consumption (72,5 psiG) - Low Pressure		lb/h	68.7
Steam pressure (low pressure)		barG	3 - 6
		psiG	43.5 - 89
Low pressure steam inlet - outlet		BSPT- ISO7.1	1"
THERMAL OIL HEATING			
Installed heating power		kW	-
Installed electrical power		kW	-
Fluid consumption (T max 175°C)		m ³ /h	-

Thermal oil connection	BSP	-	
VENTILATION			
Fan motor power	kW	0.25	
	m ³ /h	850	
Nominal air flow rate	cfm	500.29	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7.87	
HEAT EMISSION			
Maximum total heat emission	kW	1.	
	Btu/h	6145.5	
Max. front heat emission	kW	1.26	
	Btu/h	4301.8	
CONNECTIONS			
Voltage 120/60/1~ + G	Nº x AWG / A	E	G / S
Voltage 230 - 3~ + G	-	-	-
Voltage 480 - 3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	785 / 865	
	inch	30.91 / 34.06	
Net / gross depth	mm	989 / 1074	
	inch	38.94 / 42.28	
Net height / gross height without heating	mm	1.694 / 1.840	
	inch	66.69 / 72.44	
Net / gross weight	Kg	180 / 190	
	lb.	396.83 / 418.88	
OTHERS			
Sound level	dB	64	

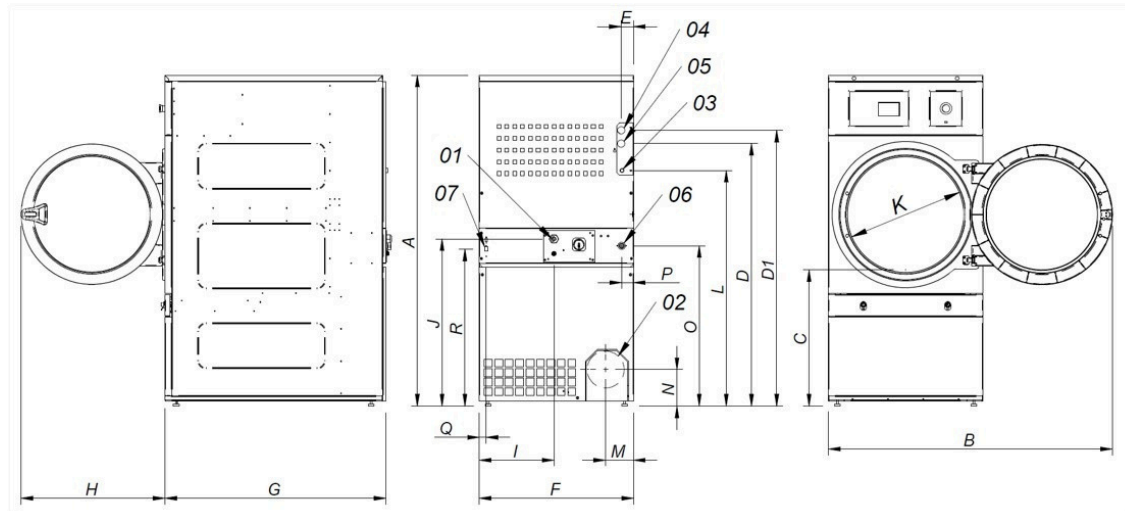

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (UDTT-25-30-35)
- 04 Steam inlet 1" (UDTT-50)
- 05 Condensate outlet 3/4" (UDTT-25-30-35)
- 05 Condensate 1" (UDTT-50)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
UDTT-30	66.69	56.96	27.12	53.30	55.98	2.67	2.67	30.9	33.66	28.93	14.96	34.25	22.63	48.26	5.2	7.08	32.67	2.55	1.37	31.69