

**ELECTRONIC PROGRAMMER**

M programmer: push buttons to control temperature and time.

**OUTSTANDING FEATURES**

Reversing drum action is standard.
Galvanized drum is standard.
Frequency inverter is standard.

**EFFICIENCY**

Lint filter.

**VERSATILITY**

Make to order - customization.
OPL > Coin laundry - Standard OPL model easily transformable to coin laundry.

**ERGONOMICS**

Large Loading doors.

**MAINTENANCE**

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.
Easy to access to components.

**OTHERS**


White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

**OPTIONS**

- Opposite door opening
- Back panel with air filter
- M programmer display

CAPACITY & DRUM		UNIT.	UDLM-35	
Capacity 1/18		Kg	18.3	
		lb.	40.4	
Capacity 1/20		Kg	16.5	
		lb.	36.3	
Ø Drum		mm	750	
		inch	29.53	
Drum length		mm	746	
		inch	29.37	
Drum volume		l	330	
		cu ft.	11.64	
Ø Door hole		mm	574	
		inch	22.60	
Door center height		mm	976	
		inch	38.43	
Height from floor to bottom of door		mm	618	
		inch	24.33	
ELECTRIC HEATING				
Evaporation capacity		L/h	14.10	
		US gallon/h	3.72	
Hourly output		Kg/h	28.3	
		lb/h	62.4	
Installed heating power		kW	18	
Installed electrical power		kW	18.67	
Drum motor power		kW	0.37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	16.30	
		US gallon/h	4.306	
Hourly output (gas model)		Kg/h	31.9	
		lb./h	70.3	
Installed gas heating power		kcal/h	17638	
		Btu/h	70000	
Installed gas heating power		kW	20.51	
Installed electrical power		kW	0.67	
Instant propane gas consumption (G31)		Kg/h	1.76	
		lb./h	3.88	
Instant natural gas consumption (G20)		m ³ /h	2.17	
		cfm	1.28	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0.25	
Nominal air flow rate		m ³ /h	850	
		cfm	500.29	
Ø Fume exhaust		mm	200	
Ø Fume exhaust		inch	8	
HEAT EMISSION				
Maximum total heat emission Max.		kW	1.8	
		Btu/h	6145.5	
front heat emission		kW	1.26	
		Btu/h	4301.8	
CONNECTIONS			E	G
Voltage 120/60/1~ + G		Nº x AWG / A	-	3 X 12 /20 A
Voltage 230 - 3~ + G		-	-	-
Voltage 480 - 3~ + G		-	-	-
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30.91 / 34.06	

Net / gross depth	mm	1125 / 1210
	inch	44.29 / 47.64
Net height / gross height without heating	mm	1694 / 1840
	inch	66.69 / 72.44
Net / gross weight	Kg	187 / 200
	lb	412.26 / 440.92
OTHERS		
Sound level	dB	64

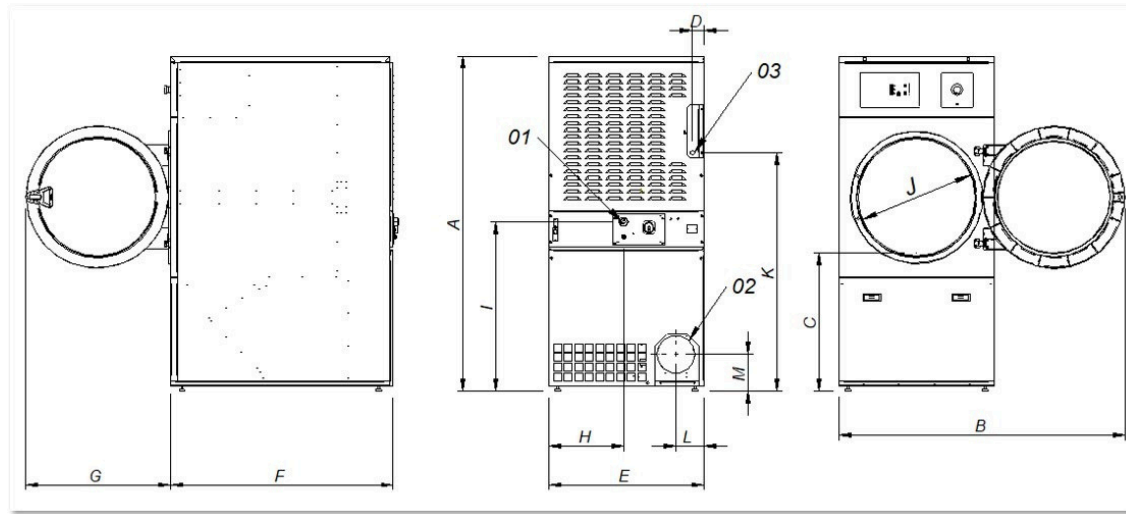

01 Power supply
02 Fumes output 8"
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
UDLM-35	66.69	56.96	27.12	2.67	30.90	44.29	28.93	14.96	34.25	22.63	48.26	5.23	7.08	1.37	31.69