

# MDG75MNV

MAYTAG® COMMERCIAL  
ON-PREMISES DRYING TUMBLER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.

## MECHANICAL CONTROLS

Dual-timer controls let you set drying and cool-down time separately, while the push-button switch makes it easy to choose the correct temperature.

## GET LAUNDRY DONE FASTER

The big-load capacity of Maytag® on-premises drying tumblers helps you save time and energy costs by drying more laundry at once. Plus, the extra-large door opening makes loading and unloading easy.

## FOR YOUR OPERATION:

- High BTU, Fast Dry Times
- Easy-to-Use Mechanical Controls
- Simple Push-to-Start Switch
- Dual Timers Show Drying and Cool-Down Times
- Extra-Large Door Opening
- 75-Pound Capacity

## BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor For Long Life Span
- 3-Year—All-Parts Warranty



Model MDG75MNV



Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) or call 800-662-3587




**MDG75MNV**  
**MAYTAG® COMMERCIAL**  
**ON-PREMISES**  
**DRYING TUMBLER**

## MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER DUAL-TIMER CONTROL

DRYER SPECIFICATIONS	
<b>MODELS</b>	MDG75MNV
<b>CAPACITY</b>	
Lbs. (kg)	75 (34)
Cu. ft. (cu. m)	22.4 (.634)
<b>TUMBLER</b>	
Diameter—in. (mm)	37 (940)
Depth—in. (mm)	36 (914)
<b>MOTOR</b>	
HP (kw)	1 (.75)
Tumble speed—rpm	40 ± 2
<b>AIRFLOW</b>	
Cfm (cmm)	1,000 (28.3)
<b>HEAT INPUT</b>	
BTU/hr. (kcal/hr.)	175,000 (44,100)
<b>GAS INLET</b>	
In. (mm) size—amps	.75 (19.05)
<b>ELECTRICAL REQUIREMENTS</b>	
Volts (Hz)/phase	
Domestic model	120 (60)/1
Export models	208–440 (50–60)/1 or 3
Breaker fuse size	20
<b>COLOR</b>	
White	
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)	771 (349.7)
Uncrated—lbs. (kg)	721 (327)
<b>DIMENSIONS</b>	
A) Height—in. (mm)	75.13 (1,908)
B) Width—in. (mm)	38.25 (971.5)
C) Depth including door handle—in. (mm)	48 (1,219)
D) Floor to center of exhaust—in. (mm)	18.25 (464)
E) Exhaust diameter—in. (mm)	8 (203)*
F) Door opening diameter—in. (mm)	31.38 (797)

\*Required 8" (203 mm) material if venting horizontally; 10" (254 mm) if venting vertically.  
 An 8"–10" (203–254 mm) transition must be used. See specific instructions for proper installation.  
 Because of continuous product improvement, Maytag reserves the right to change the specifications without notice.

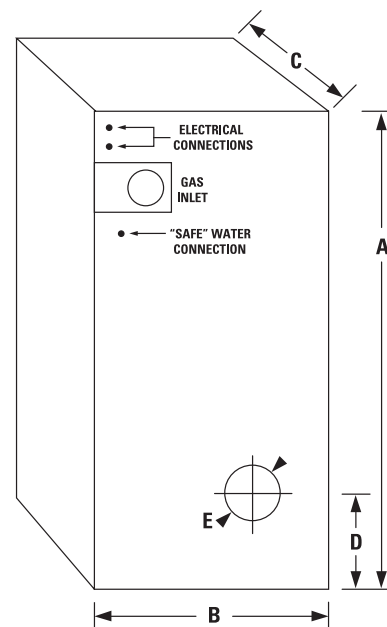

### MAYTAG® LIMITED WARRANTY 3 YEARS—ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



Chef de file en équipements de buanderie

6565 Rue Abrams, Ville St. Laurent, QC H4S 1X9  
 Phone: 1-888-427-2626 • Fax: 1-514-331-0800  
 email: info@harcocoinc.ca • www.harcoco.com

## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag brand, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.