



TOUCH II

7" touchscreen, user friendly and totally programmable.
Videos on display, ads, instructions.
37 Languages.
Free software for programming, telemetry, data analysis.
USB Connection



OUTSTANDING FEATURES

Reversing drum action is standard.
Stainless steel drum **(optional)**.
Frequency inverter is standard.



EFFICIENCY

Double Flow: mixed axial-radial airflow, Optional.
Large Lint filter.



VERSATILITY

Make to order - customization.
OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses
WET CLEANING configuration.



CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
Management of laundries: OPL and self-service.



ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
Large Loading doors.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.
Easy access to parts for reparability.



OTHERS

Grey skin plate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: natural gas and propane.
CE approved




OPTIONS

- License IoT - Domus Connect
- Back panel with air filter UDTT-100/135/180
- Natural gas heated tumble dryer
- Automatic sliding door UDTT-100/135/180 (double glass)
- Manual sliding door UDTT-100/135/180 (no double glass)
- Frontal tilting kit for models UDTT-100/135/180
- EFFICIENT DRY Humidity sensor
- Fire extinguisher SFEX UDTT-135/180
- Opposite door opening UDTT-100/135/180
- Tropicalized model
- Dosing-spraying
- Back panel with air filter UDTT-25 to UDTT-80
- Lint filter with grid 0,02 In (standard is 0,01 In)
- Lint filter with grid 0.04 In (standard is 0,01 In)
- Stainless steel front and side panels UDTT-135
- Front panel in stainless steel UDTT-100/135/180

CAPACITY & DRUM	UNIT.	UDTT-180
Capacity 1/18	Kg	83.3
	lb	183.6
Capacity 1/20	Kg	75
	lb	165.3
Ø Drum	mm	1225
	inch	48.23
Drum length	mm	1252
	inch	49.29
Drum volume	l	1500
	cu ft	52.95
Ø Door hole	mm	802
	inch	31.57
Door center height	mm	1275
	inch	50.20
Height from floor to bottom of door	mm	813
	inch	31.99
ELECTRIC HEATING		
Evaporation capacity	L/h	64
	US gallon/h	16.9
Hourly output	Kg/h	128.6
	lb/h	283,5
Installed heating power	kW	72
Installed electrical power	kW	74.65
Drum motor power	kW	1.50
GAS HEATING		
Evaporation capacity (gas model)	L/h	86.5
	US gallon/h	22.851
Hourly output (gas model)	Kg/h	173.1
	lb/h	381.6
Installed gas heating power	kcal/h	103181
	Btu/h	409456.9
Installed gas heating power	kW	120
Installed electrical power	kW	2.65
Instant propane gas consumption (G31)	Kg/h	10.28
	lb/h	22.66
Instant natural gas consumption (G20)	m³/h	12.71
	cfm	7.48
Ø Gas inlet	BSPP ISO 228-1	3/4"
STEAM HEATING		
Installed steam heating power	kW	128
	Btu/h	436754
Installed electrical power	kW	2.65
Steam consumption (8 barG) - Standard	kg/h	171
Steam consumption (116 psiG)	lb/h	206
Steam pressure	barG	7 - 12
	psiG	101.5 - 178
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	147
Steam consumption (72,5 psiG) - Low Pressure	lb/h	177.1
Steam pressure (low pressure)	barG	4 - 7
	psiG	58 - 101.5
Low pressure steam inlet - outlet	BSPT- ISO7.1	1" 1/2
THERMAL OIL HEATING		
Installed heating power	kW	128
Installed electrical power	kW	2.65
Fluid consumption (T max 175°C)	m3/h	10

Thermal oil connection	BSP	1" 1/2	
VENTILATION			
Fan motor power	kW	1.1	
Nominal air flow rate	m³/h	3000	
	cfm	1765.73	
Ø Fume exhaust	mm	300	
Ø Fume exhaust	inch	11.81	
HEAT EMISSION			
Maximum total heat emission	kW	6.48	
	Btu/h	22123.6	
Max. front heat emission	kW	2.88	
	Btu/h	9832.7	
CONNECTIONS		E	S
Voltage 208-240/60/1~ + G	-	-	-
Voltage 230/3~ + G	Nº x AWG / A	-	4 x 10/ 25A
Voltage 440-480/3 ~ + G	Nº x AWG / A	-	4 x 14/ 15A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	1270 / 1330	
	inch	50 / 52.36	
Net / gross depth	mm	1598 / 1705	
	inch	62.91 / 67.13	
Net height / gross height without heating	mm	2380 /*2200	
	inch	93.70 / *86.61	
Net / gross weight	Kg	657 / 715	
	lb	1.448.44 / 1.576.31	
OTHERS			
Sound level	dB	67	

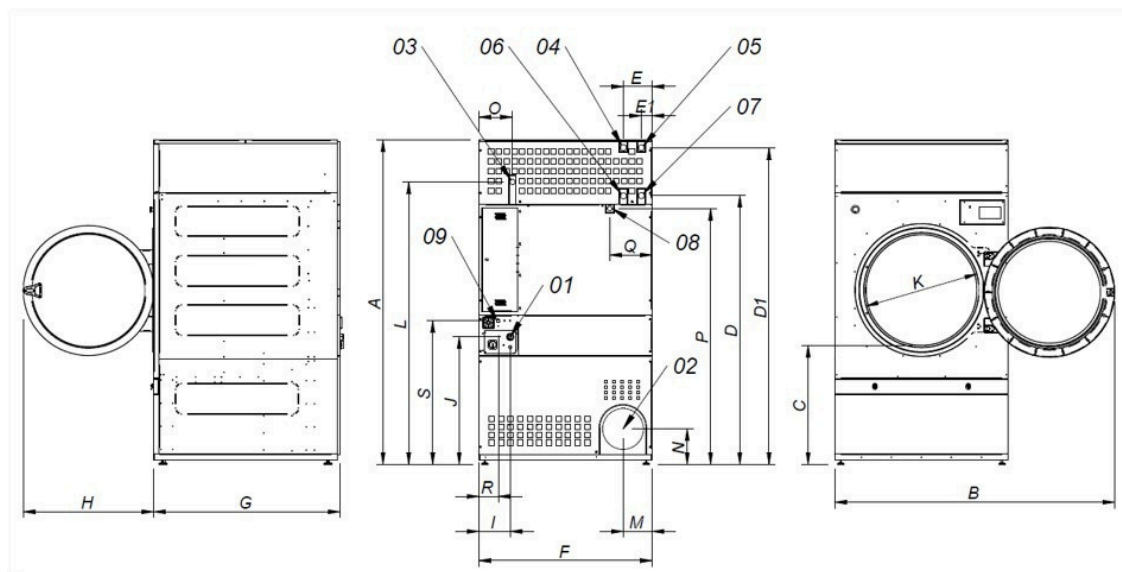

01 Power supply 02 Fumes output Ø 300 03 Gas inlet 1/2" 04 Steam inlet 1" (DTT-45) 05 Steam inlet 1" (DTT-60-80) 06 Condensate outlet 1" (DTT-45) 07 Condensate outlet 1" (DTT-60-80) 08 Sprinkler valve 3/4" 09 Ethernet connection (only TOUCH Control)

UDTT-	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
180	93.70	80.51	34.4	77.99	90.98	8.30	3.1	50	43.54	37.6	9.76	36.8	31.5	82.20	8.42	9.44	9.60	72.48	12.1	6.29	41.45