

ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action is standard.
Galvanized drum is standard.
Frequency inverter is standard.

VERSATILITY

Make to order - customization.
OPL > Self-service - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

Lint filter, stainless steel mesh.
Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS

White panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: natural gas and propane.
CE approved




OPTIONS

- Natural gas heated tumble dryer
- Screen in M programmer (2 units)
- Lint filter with grid 0,01 In (standard in STACK is 0,02 In)

CAPACITY & DRUM		UNIT.	UDLM2-25
Capacity 1/18		Kg	11.7
		lb.	25.7
Capacity 1/20		Kg	10.5
		lb.	23.1
Ø Drum		mm	750
		inch	29.53
Drum length		mm	475
		inch	18.70
Drum volume		l	210
		cu ft.	7.41
Ø Door hole		mm	574
		inch	22.60
Door center height		mm	547 / 1522
		inch	21.54 / 59.92
Height from floor to bottom of door		mm	189 / 1164
		inch	7.32 / 45.83
ELECTRIC HEATING			
Evaporation capacity		L/h	15.8
		US gallon/h	4.17
Hourly output		Kg/h	31.6
		lb/h	69.7
Installed heating power		kW	12 x2
Installed electrical power		kW	25.34
Drum motor power		kW	0.37 x2
GAS HEATING			
Evaporation capacity (gas model)		L/h	15.3
		US gallon/h	4.042
Hourly output (gas model)		Kg/h	30.6
		lb./h	67.5
Installed gas heating power		kcal/h	10327 x2
		Btu/h	40945.7 x2
Installed gas heating power		kW	12 x2
Installed electrical power		kW	1.34
Instant propane gas consumption (G31)		Kg/h	1.03 x2
		lb./h	2.27 x2
Instant natural gas consumption (G20)		m ³ /h	1.27 x2
		cfm	0.75 x2
Ø Gas inlet		BSPP ISO 228-1	1/2"
VENTILATION			
Fan motor power		kW	0.25 x2
Nominal air flow rate		m ³ /h	500 x2
		cfm	294.28 x2
Ø Fume exhaust		mm	200 x2
Ø Fume exhaust		inch	8 x2
HEAT EMISSION			
Maximum total heat emission Max.		kW	2.4
		Btu/h	8193.9
front heat emission		kW	1.68
		Btu/h	5735.8
CONNECTIONS			
Voltage 120/60/1~ + G	Nº x AWG / A	E	G
Voltage 230 - 3~ + G	-	-	-
Voltage 480 - 3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width		mm	785 / 865
		inch	30.91 / 34.06

Net / gross depth	mm	972 / 1055
	inch	38.27 / 41.54
Net height / gross height without heating	mm	1980 / 2126
	inch	77.95 / 83.70
Net / gross weight	Kg	260 / 268
	lb	573.20 / 590.84
OTHERS		
Sound level	dB	64

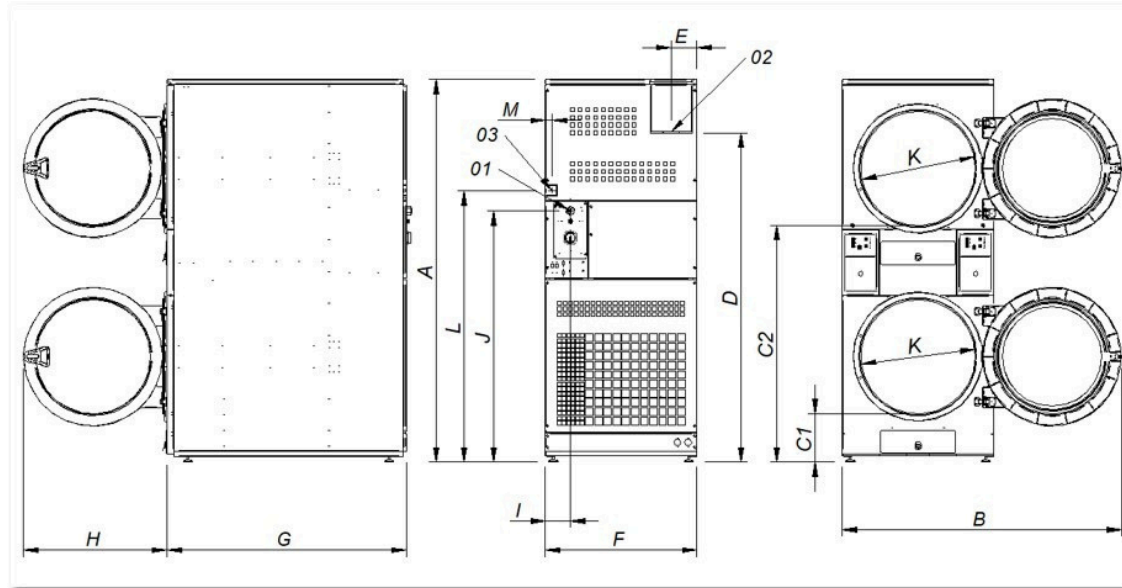

01 Power supply
02 Fumes output 8"
03 Gas inlet 1/2"

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
UDLM2- 25	77.95	56.96	10.07	48.58	66.14	5.31	30.90	38.26	28.93	5.11	50.19	22.63	55.35	1.37