

TOUCH II

7" touchscreen, user friendly and totally programmable.
 Videos on display, ads, instructions.
 37 Languages.
 Free software for programming, telemetry, data analysis.
 USB Connection

OUTSTANDING FEATURES

Reversing drum action is standard.
 Stainless steel drum (**optional**).
 Frequency inverter is standard.

EFFICIENCY

Double Flow: mixed axial-radial airflow.

VERSATILITY

Make to order - customization.
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses
 Wet Cleaning phases customizes parameters

CONNECTIVITY

IoT- **DOMUSCONNECT** standard.
 Management of laundries: OPL and COIN.

ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
 Large Loading doors.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.

OTHERS

Grey skin plate outer casing, stainless steel look.
 SOFT DRY - new drum with stamped holes.
 COOL DOWN - anti-wrinkle at the end of the cycle.
 Heating options: natural gas and propane.
 CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY for STACK (order 1 unit per column)
- Double door glass (order 1 unit per column)
- Fire extinguisher SFEX STACK (order 1 unit per column)
- Tropicalized model (order 1 unit per column)
- Opposite door opening (order 1 unit per column)
- Dosing-spraying (1 unit x column)
- Back panel with air filter (STACK)
- Lint filter with grid 0.01 In (standard in STACK is 0.02 In)
- Front panel in stainless steel UDTT2-25/30/35

CAPACITY & DRUM		UNIT.		UDTT2-25	
Capacity 1/18		Kg		11.7	
		lb		25.7	
Capacity 1/20		Kg		10.5	
		lb		23.1	
Ø Drum		mm		750	
		inch		29.53	
Drum length		mm		475	
		inch		18.70	
Drum volume		l		210	
		cu ft		7.41	
Ø Door hole		mm		574	
		inch		22.60	
Door center height		mm		547 / 1522	
		inch		21.54 / 59.92	
Height from floor to bottom of door		mm		189 / 1164	
		inch		7.32 / 45.83	
ELECTRIC HEATING					
Evaporation capacity		L/h		15.8	
		US gallon/h		4.17	
Hourly output		Kg/h		31.6	
		lb/h		69.7	
Installed heating power		kW		12 x2	
Installed electrical power		kW		25.34	
Drum motor power		kW		0.37 x2	
GAS HEATING					
Evaporation capacity (gas model)		L/h		15.3	
		US gallon/h		4.042	
Hourly output (gas model)		Kg/h		30.6	
		lb/h		67.5	
Installed gas heating power		kcal/h		10327 x2	
		Btu/h		40945.7 x2	
Installed gas heating power		kW		12 x2	
Installed electrical power		kW		1.34	
Instant propane gas consumption (G31)		Kg/h		1.03 x2	
		lb/h		2.27 x2	
Instant natural gas consumption (G20)		m ³ /h		1.27 x2	
		cfm		0.75 x2	
Ø Gas inlet		BSPP ISO 228-1		1/2"	
VENTILATION					
Fan motor power		kW		0.25 x2	
Nominal air flow rate		m ³ /h		500 x2	
		cfm		294.28 x2	
Ø Fume exhaust		mm		200 x2	
Ø Fume exhaust		inch		7.78 x2	
HEAT EMISSION					
Maximum total heat emission Max. front heat emission		kW		2.4	
		Btu/h		8193.9	
		kW		1.68	
		Btu/h		5735.8	
CONNECTIONS				E	G
Voltage 120/60/1~ + G		Nº x AWG / A		-	3 X 14 /15 A
Voltage 230 - 3~ + G		-		-	-
Voltage 480 - 3~ + G		-		-	-
NET DIMENSIONS / D. WITH PACKING					
Net / gross width		mm		785 / 865	
		inch		30.91 / 34.06	

Net / gross depth	mm	972 / 1.055
	inch	38.27 / 41.54
Net height / gross height without	mm	1980 / 2126
	inch	77.95 / 83.70
heating Net / gross weight	Kg	260 / 268
	lb	573.20 / 590.84
OTHERS		
Sound level	dB	64

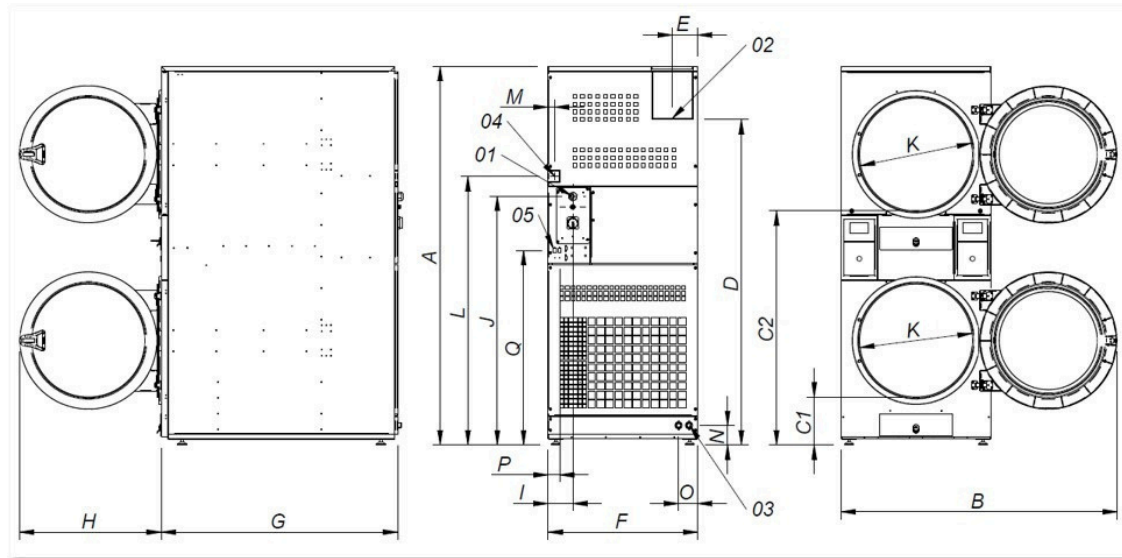

- 01 Power supply
- 02 Fumes output Ø 200
- 03 2 sprinkler valves 3/4"
- 04 Gas inlet 1/2"
- 05 Ethernet connection (only TOUCH control)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
UDTT2-25	77.95	56.96	10.19	48.58	66.14	5.31	30.90	38.26	28.93	5.11	50.19	22.63	5.35	1.3	4.05	3.93	2.36	40.07