

# HPD-20/25 TOUCH II HEAVY PROFESSIONAL DRYERS



## VERSATILITY

### OPL <> COIN

Standard models can be programmed as OPL or coin laundry version, central pay, etc.

### SINGLE <> STACKED

Models can be stacked on top of a washer or on another dryer. Control panels can be assembled between both drums for better ergonomics. Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.



## OUTSTANDING FEATURES

TOUCH II: User friendly and fully programmable microprocessor with a 4,3" touch screen

USB connection

Remote WIFI connection

Reduced drying times (less than 45 minutes)

6,75 kw heating, option 4,5 kw



## EFFICIENCY

Optimised airflow

Wide fluff filter as drawer

Efficient design



## ROBUSTNESS

Outer casing in grey skinplate

Robust aluminium big door

Drawer as fluff filter (not in the door but as an specific drawer)

Industrial fan and powerful airflow

Sturdy construction of the dryer structure and panels



## OTHERS

Transmission by pulley and belt

Galvanized drum

Axial airflow

Bigger door diameters Ø588

COOL DOWN - anti-wrinkle at the end of the cycle

Electric heating

CE approved product




HPD-8/10 TOUCH II

## OPTIONS

- EFFICIENT DRY humidity control
- DomusConnect: communication kit
- AISI 304 stainless steel outer casing
- AISI 304 stainless steel drum
- Reversing door opening
- Tropicalized model: protected board
- Plinth for better ergonomics
- Maritime voltage 440V III 50/60 Hz No neutral
- Voltage 400 V/ 230 V I/III 60 Hz
- Coin /token kit

| TECHNICAL DATA                  | UNIT       | HPD-20            | HPD-25            |
|---------------------------------|------------|-------------------|-------------------|
| CAPACITY & DRUM                 |            |                   |                   |
| Capacity 1:20                   | lbs        | 20                | 25                |
| Volume (litres)                 | gl         | 42                | 53                |
| Drum diameter Ø                 | in         | 23.22"            | 23.22"            |
| Drum depth                      | in         | 23.03'            | 27.16'            |
| DOOR                            |            |                   |                   |
| Height center door              | in         | 21.45"            | 21.45'            |
| Height base door                | in         | 9.84'             | 9.84'             |
| Door diameter                   | in         | 23.14'            | 23.14"            |
| GENERAL DETAILS                 |            |                   |                   |
| Touch II Control                | -          | Touch screen 4,3" | Touch screen 4,3" |
| USB connection                  | -          | Yes               | Yes               |
| Construction                    | -          | Skinplate panels  | Skinplate panels  |
| Plinth                          | -          | OPT               | OPT               |
| Coin laundry version            | -          | Yes               | Yes               |
| Noise level                     | dB         | 62                | 62                |
| POWER                           |            |                   |                   |
| Motor                           | kW         | 0,37              | 0,37              |
| Electric heating                | kW         | 4,5 / 6,75        | 4,5 / 6,75        |
| CONNECTIONS                     |            |                   |                   |
|                                 |            | ELECTRIC          | ELECTRIC          |
| Tension 230V I+N+T 50Hz         | Nº x mm2/A | 3 x 10 / 40A      | 3 x 10 / 40A      |
| Tension 230V III+T 50Hz         | Nº x mm2/A | 4 x 4 / 25A       | 4 x 4 / 25A       |
| Tension 400V III+N+T 50Hz       | Nº x mm2/A | 5 x 2,5 / 16A     | 5 x 2,5 / 16A     |
| Tension 230V I+N+T 60Hz         | Nº x mm2/A | 3 x 10 / 40A      | 3 x 10 / 40A      |
| Tension 230V III+T 60Hz         | Nº x mm2/A | 4 x 4 / 25A       | 4 x 4 / 25A       |
| Tension 400V III+N+T 60Hz       | Nº x mm2/A | 5 x 2,5 / 16A     | 5 x 2,5 / 16A     |
| Tension 440 III+T 60Hz          | Nº x mm2/A | 5 x 2,5 / 16A     | 5 x 2,5 / 16A     |
| Tension 460/480 III+T 60Hz      | Nº x mm2/A | 5 x 2,5 / 16A     | 5 x 2,5 / 16A     |
| Fume exhaust Ø                  | mm         | 100               | 100               |
| Maximum airflow                 | m3/hour    | 300               | 300               |
| DIMENSIONS / PACKING DIMENSIONS |            |                   |                   |
| Net width / Gross width         | in         | 26.77" / 27.95'   | 680 / 710         |
| Net Depth / Gross Depth         | in         | 29.72" / 32.75"   | 775 / 832         |
| Net Height / Gross Height       | in         | 41.57" / 44.92'   | 1056 / 1141       |
| Net weight / Gross weight       | lbs        | 205.03 / 229.28   | 92,6 / 104,1      |
| Volume                          | m3         | 0,67              | 0,67              |

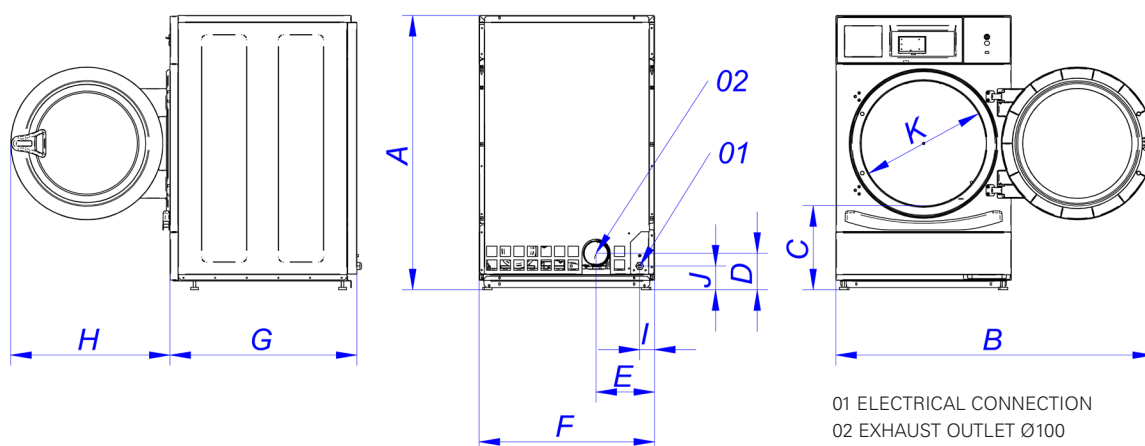

|        | A      | B      | C      | D     | E     | F      | G      | H      | I     | J     | K      |
|--------|--------|--------|--------|-------|-------|--------|--------|--------|-------|-------|--------|
| HPD-20 | 41.57" | 48.30' | 12.59" | 5.31" | 8.89" | 26.77" | 28.42" | 24.21" | 2.44" | 3.58' | 18.89' |
| HPD-25 | 41.57" | 48.30' | 12.59" | 5.31" | 8.89" | 26.77" | 28.42" | 24.21" | 2.44" | 3.58' | 18.89' |

