



TOUCH II

7" touchscreen, user friendly and totally programmable.
Videos on display, ads, instructions.
37 Languages.
Free software for programming, telemetry, data analysis.
USB Connection



G FORCE

G-FACTOR 200: 25 - 100 Lbs.
G-FACTOR 150: 135- 180 Lbs.



EFFICIENCY

Intelligent consumption: automatic adjustment of water and soap consumptions (standard).
Optimal loading: manual indication of weight.
Low water consumption.



VERSATILITY

Make to order: customization.
OPL or Self-service.
Electric or Hot water.
Wet cleaning features.



CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
Remote technical service.
Management of laundries: self-service & OPL.



ERGONOMICS

Reversible doors.
Large Loading doors:
• Ø 373 (25, 30 Lbs.)
• Ø 460 (40, 50, 65 Lbs.)
• Ø 560 (80, 100, 135 lbs.)



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.
Equivalent parts for all models: electronic parts, contactors.



OTHERS

Hard mounted washers.
Anchoring to floor with anchoring base.
Panels in skin plate.
3 water inlets.
CB and WRAS approved product.




OPTIONS

- License IoT - Domus Connect
- Ready for ECOTANK XL conn. 1" for washers DLU/DHU-135C/180C
- EXTRA DOSING PUMP DB-1
- Anchoring base for DLU-180C
- Double drain kit for DLU-135C/180C
- Normally closed valve DLU-135C/180C
- Water inlet hose for DLU-135C/180C (one per water intake)
- 6 extra dosing signals card DLU-135C/180C
- Reverse door opening
- Tropicalized model: protected board (TOUCH II)
- Kit to transform an E or HW DLU-135C/180C to steam
- Stainless steel AISI 304 outer casing for DLU-180C
- Stainless steel AISI 304 top and front panel for DLU-180C
- Auto unlock kit for the door (in case of power failure) DLU-DHU

DRUM	UNIT.	DLU-180C TOUCH II	
Capacity 1/9	Lb.	187.4	
Capacity 1/10	Lb.	169.8	
Volume	Cu.Ft	28.2	
Diameter	in	41.3	
Depth	In	36.9	
GENERAL DETAILS			
Washing speed / Spinning speed	r.p.m.	42.5 / 505	
G Factor	-	150	
Maximum force transmitted	KN	10.17 ±15	
Frequency-dynamic force	Hz	6.93	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting door	-	NO	
SLUICE option	-	YES	
DOOR			
Height center door / Height door	In	35.5 / 21.3	
Diameter	In	22.1	
POWER			
Motor	Hp	7.4	
Electric heating power	kW	48/36***	
Total electric power (electric model)	kW	50.5/38.5***	
Total electric power (hw, steam model)	kW	7.5	
CONNECTIONS		E	HW/S
Voltage 208-240/60/1~ + G	Nº x AWG / A	-	-
Voltage 230/3~ + G	Nº x AWG / A	4x 2 / 125A	4x 8 / 50A
Voltage 440-480/3 ~ + G	Nº x AWG / A	4x 6 / 70A	4x 10/30A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	21	
Water inlet	inch	1"	
Water main pressure	Kgs/cm²	2-4	
Maximum water consumption*	Gal/h	215**	
Drain	mm/inch	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	In	48.23 / 52.6	
Net Depth/Gross depth	In	58.85 / 65.4	
Net Height / Gross height	In	64.57 / 73.3	
Net weight / Gross weight	Lb.	1920.6 / 2123.4	
Volume	Ft3	145.5	

* Program No. 20: DLU-25 to DLU-100C with 75% load and program no. 2: DLU-135C and 180C with 100% load

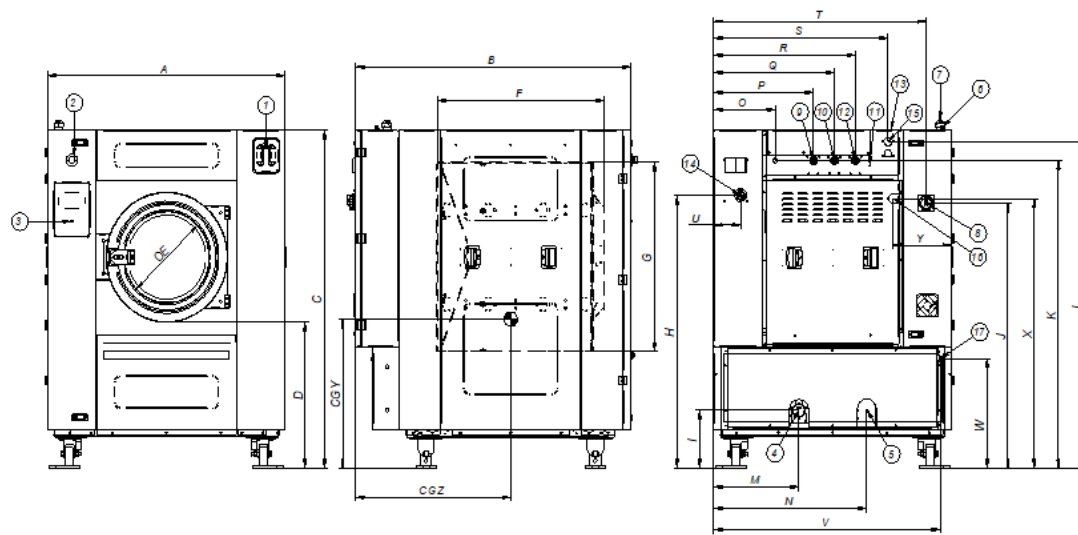

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain 1
5. Drain 2
6. Electric connection to liquid soap pumps
7. Electrical connection
8. Main switch
9. Auxiliary water inlet
10. Hot water inlet
11. Equipotential connection
12. Cold water inlet
13. Steam output
14. Liquid soap connection
15. Steam connection
16. Air intake
17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLU-180C	mm	1225	1492	1640	540	560	115	984	1368	1536	1306	1551	1318	61	74	101	651	731	1110	869	318	1163	1080	1470	992	1595	644	750
	inch	48.23	58.74	64.57	21.26	22.05	4.53	38.74	53.86	60.47	51.42	61.06	51.89	2.40	2.91	3.98	25.63	28.78	43.70	34.21	12.52	45.79	42.52	57.87	39.06	62.80	25.35	29.53