



TOUCH II

7" touchscreen, user friendly and totally programmable.
Videos on display, ads, instructions.
37 Languages.
Free software for programming, telemetry, data analysis.
USB Connection



OUTSTANDING FEATURES

Reversing drum action is standard.
Stainless steel drum is standard.
Frequency inverter is standard.



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control, with new drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system.
THERMAL INSULATION - Complete air-flow circuit and double door glass.
New optimized system of mixed airflow.



VERSATILITY

Make to order - customization.
WET CLEANING configuration.



CONNECTIVITY

Standard IoT Domus Connect.
Management for laundries: OPL and self-service.



ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
Large Loading doors.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.



OTHERS

Grey skin plate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
SFEX - Integrated Fire Extinguishing System.
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: natural gas or propane.
CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing Spraying
- Back panel with air filter UDTM-25 to UDTM-80
- Lint filter with grid 0,02 In (standard is 0,01 In)
- Lint filter with grid 0.04 In (standard is 0,01 In)
- Stainless steel front and side panels UDTT-80
- Front panel in stainless steel UDTT-50

CAPACITY & DRUM	UNIT.	UDTT-50 ECO-ENERGY
Capacity 1/18	Kg	24.3
	lb	53.9
Capacity 1/20	Kg	21.9
	lb	48.5
Ø Drum	mm	835
	inch	32.87
Drum length	mm	800
	inch	31.5
Drum volume	l	440
	cu ft	15.54
Ø Door hole	mm	574
	inch	22.60
Door center height	mm	1030
	inch	40.55
Height from floor to bottom of door	mm	672
	inch	26.46
ELECTRIC HEATING		
Evaporation capacity	L/h	20
	US gallon/h	5.3
Hourly output	Kg/h	40
	lb/h	88.2
Installed heating power	kW	24
Installed electrical power	kW	25.7
Drum motor power	kW	0.37
GAS HEATING		
Evaporation capacity (gas model)	L/h	22.30
	US gallon/h	5.9
Hourly output (gas model)	Kg/h	44.60
	lb/h	98.3
Installed gas heating power	kcal/h	26655
	Btu/h	105776
Installed gas heating power	kW	31
Installed electrical power	kW	1.17
Instant propane gas consumption (G31)	Kg/h	2.66
	lb/h	5.86
Instant natural gas consumption (G20)	m³/h	3.28
	cfm	1.93
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	49.20
	Btu/h	167877
Installed electrical power	kW	1.17
Steam consumption (8 barG) - Standard	kg/h	87
Steam consumption (116 psiG)	lb/h	104.8
Steam pressure	barG	6 - 9
	psiG	87 - 130.5
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	93
Steam consumption (72.5 psiG) - Low Pressure	lb/h	112
Steam pressure (low pressure)	barG	3 - 6
	psiG	43.5 - 87
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m3/h	-

Thermal oil connection	BSP	-	
VENTILATION			
Fan motor power	kW	0.75	
Nominal air flow rate	m³/h	1500	
	cfm	882.9	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7.87	
HEAT EMISSION			
Maximum total heat emission	kW	1.92	
	Btu/h	6555.1	
Max. front heat emission	kW	1.2	
	Btu/h	4097	
CONNECTIONS		E	G
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230/3~ + G	-	-	-
Voltage 480/3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	890 / 970	
	inch	35.04 / 38.19	
Net / gross depth	mm	1255 / 1345	
	inch	49.41 / 52.95	
Net height / gross height without heating	mm	1812 / 1940	
	inch	71.34 / 76.38	
Net / gross weight	Kg	210 / 230	
	lb	462.97 / 507.06	
OTHERS			
Sound level	dB	65	

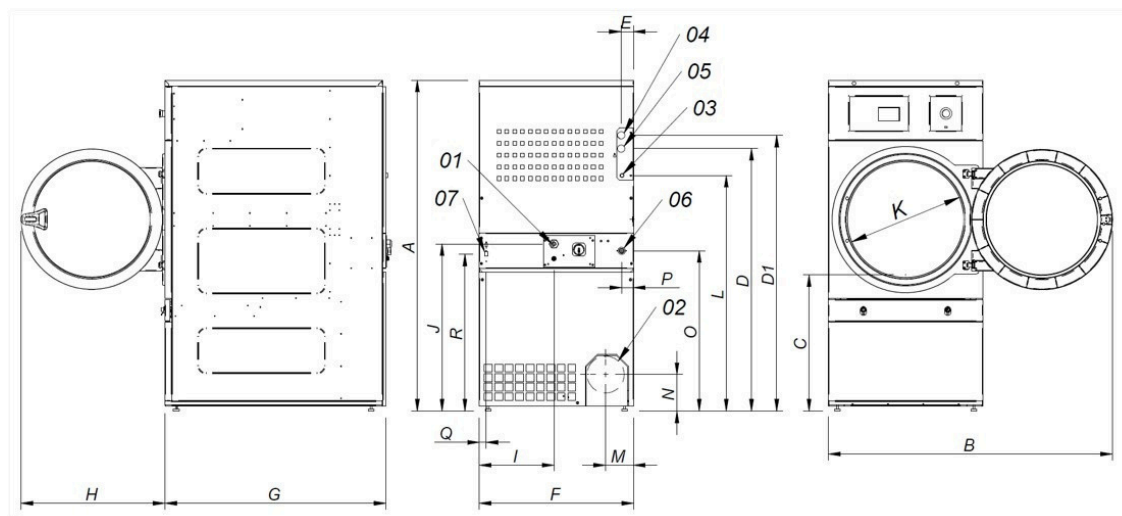

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4"
- (UDTT-25-30-35)
- 04 Steam inlet 1" (UDTT-50)
- 05 Condensate outlet 3/4"
- (UDTT-25-30-35)
- 05 Condensate 1" (UDTT-50)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

UDTT-50	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
ECO-ENERGY	71.33	61.10	29.25	56.21	60.31	4.40	2.16	35.03	49.40	28.93	4.21	36.22	22.63	52.91	9.37	7.08	34.84	2.55	1.45	33.85