

## TOUCH II

7" touchscreen, user friendly and totally programmable.  
 Videos on display, ads, instructions.  
 37 Languages.  
 Free software for programming, telemetry, data analysis.  
 USB Connection

## OUTSTANDING FEATURES

Reversing drum action is standard.  
 Stainless steel drum (**optional**).  
 Frequency inverter is standard.

## EFFICIENCY

**Double Flow:** mixed axial-radial airflow, Optional.  
 Large Lint filter.

## VERSATILITY

Make to order - customization.  
 OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses WET CLEANING configuration.

## CONNECTIVITY

IoT - **DOMUSCONNECT** standard.  
 Management of laundries: OPL and self-service.

## ERGONOMICS

Lint Filter Drawer, stainless steel mesh.  
 Large Loading doors.

## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
 Technical menu: statistics for technicians.  
 Easy access to parts for reparability.

## OTHERS

Grey skin plate outer casing, stainless steel look.  
**NEW:** Geared motor drive on models UDTT-100 to UDTT-180  
 SOFT DRY - new drum with stamped holes.  
 COOL DOWN - anti-wrinkle at the end of the cycle.  
 Heating options: natural gas and propane.  
 CE approved




## OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double door glass UDTT-25/30/35
- Fire extinguisher SFEX UDTT-25/30/35
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing-spraying
- Back panel with air filter UDTT-25 to UDTT-80
- Lint filter with grid 0.02 In (standard is 0.01 In)
- Lint filter with grid 0.04 In (standard is 0.01 In)
- Stainless steel front and side panels UDTT-25
- Front panel in stainless steel UDTT-25/30/35

CAPACITY & DRUM		UNIT.	UDTT-25
Capacity 1/18		Kg	11.7
		lb	25.7
Capacity 1/20		Kg	10.5
		lb	23.1
Ø Drum		mm	750
		inch	29,53
Drum length		mm	475
		inch	18.70
Drum volume		l	210
		cu ft	7.41
Ø Door hole		mm	574
		inch	22,60
Door center height		mm	976
		inch	38,43
Height from floor to bottom of door		mm	618
		inch	24.33
ELECTRIC HEATING			
Evaporation capacity		L/h	11
		US gallon/h	2.91
Hourly output		Kg/h	21.7
		lb/h	47.8
Installed heating power		kW	12
Installed electrical power		kW	12.97
Drum motor power		kW	0.37
GAS HEATING			
Evaporation capacity (gas model)		L/h	15.4
		US gallon/h	3.9
Hourly output (gas model)		Kg/h	31.3
		lb/h	68.9
Installed gas heating power		kcal/h	17638
		Btu/h	70000
Installed gas heating power		kW	20.51
Installed electrical power		kW	0.97
Instant propane gas consumption (G31)		Kg/h	1.76
		lb/h	3.88
Instant natural gas consumption (G20)		m <sup>3</sup> /h	2.17
		cfm	1.28
Ø Gas inlet		BSPP ISO 228-1	1/2"
STEAM HEATING			
Installed steam heating power		kW	30
		Btu/h	102364
Installed electrical power		kW	0.97
Steam consumption (8 barG) - Standard		kg/h	53
Steam consumption (116 psiG)		lb/h	63.8
Steam pressure		barG	6 - 9
		psiG	87 - 130.5
Standard steam inlet - outlet		BSPT- ISO7.1	3/4"
Standard steam inlet - outlet		NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure		kg/h	57
Steam consumption (72,5 psiG) - Low Pressure		lb/h	68.7
Steam pressure (low pressure)		barG	3 - 6
		psiG	43.5 - 89
Low pressure steam inlet - outlet		BSPT- ISO7.1	1"
THERMAL OIL HEATING			
Installed heating power		kW	-
Installed electrical power		kW	-
Fluid consumption (T max 175°C)		m <sup>3</sup> /h	-

Thermal oil connection	BSP	-
<b>VENTILATION</b>		
Fan motor power	kW	0.55
Nominal air flow rate	m <sup>3</sup> /h	1200
	cfm	706.3
Ø Fume exhaust	mm	200
Ø Fume exhaust	inch	7.87
<b>HEAT EMISSION</b>		
Maximum total heat emission	kW	0.96
	Btu/h	3277.6
Max. front heat emission	kW	0.6
	Btu/h	2048.
<b>CONNECTIONS</b>		
Voltage 120/60/1~ + G	Nº x AWG / A	E 5 S - 3 x 12 / 20A
Voltage 230 - 3~ + G	-	-
Voltage 480 - 3~ + G	-	-
<b>NET DIMENSIONS / D. WITH PACKING</b>		
Net / gross width	mm	785 / 865
	inch	30.91 / 34.06
Net / gross depth	mm	855 / 940
	inch	33.66 / 37.01
Net height / gross height without heating	mm	1694 / 1840
	inch	66.69 / 72.44
Net / gross weight	Kg	172 / 180
	lb.	379.20 / 396.83
<b>OTHERS</b>		
Sound level	dB	64

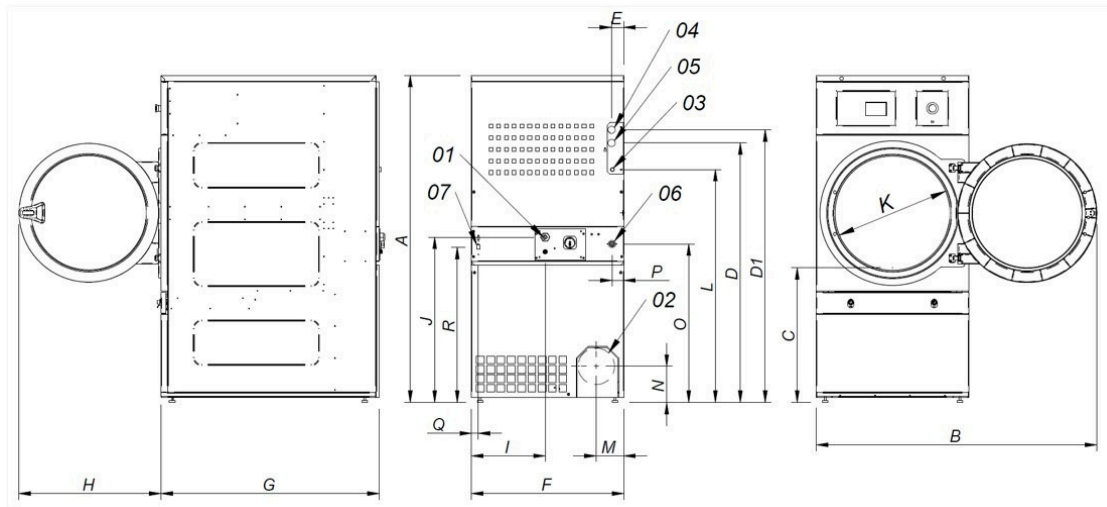

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (UDTT-25-30-35)
- 04 Steam inlet 1" (UDTT-50)
- 05 Condensate outlet 3/4" (UDTT-25-30-35)
- 05 Condensate 1" (UDTT-50)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
UDTT-25	66.69	56.96	27.12	53.30	55.98	2.67	2.67	30.9	33.66	28.93	14.96	34.25	22.63	48.26	5.2	7.08	32.67	2.55	1.37	31.69