

**ELECTRONIC PROGRAMMER**

M programmer: push buttons to control temperature and time.

**OUTSTANDING FEATURES**

Reversing drum action is standard.
Galvanized drum is standard.
Frequency inverter is standard.

**EFFICIENCY**

Lint filter.

**VERSATILITY**

Make to order - customization.
OPL > Coin laundry - Standard OPL model easily transformable to coin laundry.

**ERGONOMICS**

Large Loading doors.

**MAINTENANCE**

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.
Easy to access to components.

**OTHERS**


White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

**OPTIONS**

- Opposite door opening
- Back panel with air filter
- M programmer display

CAPACITY & DRUM		UNIT.	UDLM-50	
Capacity 1/18		Kg	24.4	
		lb.	53.9	
Capacity 1/20		Kg	22.0	
		lb.	48.5	
Ø Drum		mm	835	
		inch	32.87	
Drum length		mm	800	
		inch	31.5	
Drum volume		l	440	
		cu ft.	15.54	
Ø Door hole		mm	574	
		inch	22.60	
Door center height		mm	1030	
		inch	40.55	
Height from floor to bottom of door		mm	672	
		inch	26.46	
ELECTRIC HEATING				
Evaporation capacity		L/h	17	
		US gallon/h	4.5	
Hourly output		Kg/h	34	
		lb/h	75	
Installed heating power		kW	24	
Installed electrical power		kW	24.97	
Drum motor power		kW	0.37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	22,30	
		US gallon/h	5,283	
Hourly output (gas model)		Kg/h	40	
		lb./h	88,2	
Installed gas heating power		kcal/h	26655	
		Btu/h	105775,6	
Installed gas heating power		kW	31	
Installed electrical power		kW	0,97	
Instant propane gas consumption (G31)		Kg/h	2,66	
		lb./h	5,86	
Instant natural gas consumption (G20)		m ³ /h	3,28	
		cfm	1,93	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0.55	
Nominal air flow rate		m ³ /h	1200	
		cfm	706.29	
Ø Fume exhaust		mm	200	
Ø Fume exhaust		inch	8	
HEAT EMISSION				
Maximum total heat emission Max.		kW	2.4	
		Btu/h	8193.9	
front heat emission		kW	1.68	
		Btu/h	5735.8	
CONNECTIONS				
Voltage 120/60/1~ + G		Nº x AWG / A	E	G
Voltage 230 - 3~ + G		-	-	3 X 12 /20 A
Voltage 480 - 3~ + G		-	-	-
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	890 / 970	
		inch	35,04 / 38,19	

Net / gross depth	mm	1255 / 1345
	inch	49.41 / 52.95
Net height / gross height without heating	mm	1812 / 1940
	inch	71.34 / 76.38
Net / gross weight	Kg	210 / 230
	lb	462.97 / 507.06
OTHERS		
Sound level	dB	65

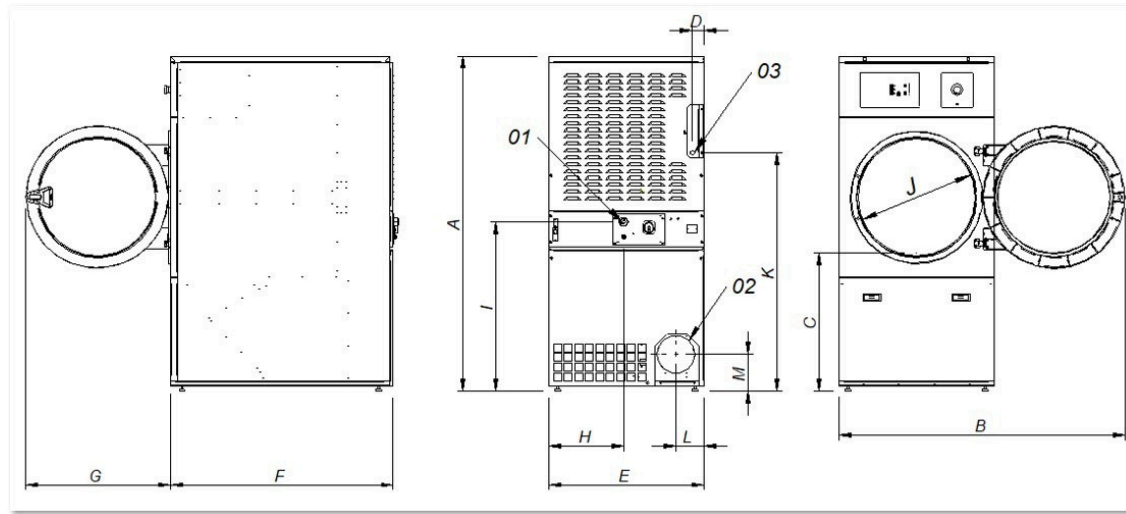

01 Power supply
02 Fumes output 8"
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
UDLM-50	71.33	61.10	29.25	4.40	35.03	49.40	28.93	4.21	36.22	22.63	52.91	9.37	7.08	1.45	33.85